


DOUBLE DECK TERMINALS - FRKD/FSLD 2.5MM²

FRKD,FSLD,

3206.5
FRKD 2,5/3A BU

- Wiring without tools
- Internally linked versions
- Colour coded options
- 2 and 3 connections
- Electronic component versions

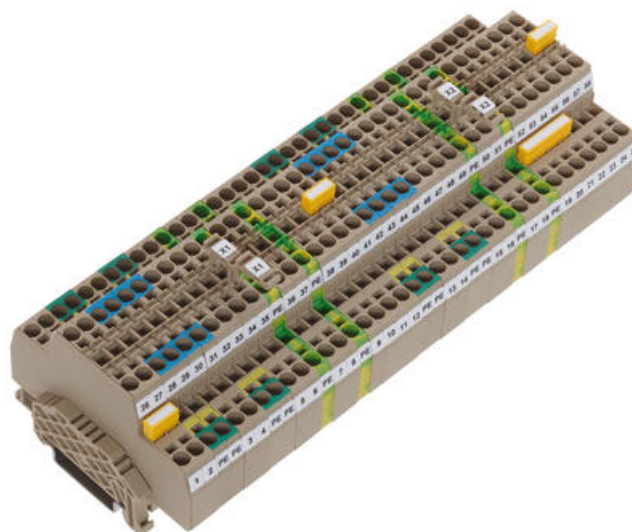

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

| | |
|--------------------------|---------------------|
| Rated wire cross section | 2.5 mm ² |
| Colour | Blue |
| Rated voltage IEC | 500 V |
| Rated current IEC | 24 A |
| Mounting | TS 35 |
| Rated impulse voltage | 6 kV |
| Overvoltage category | III |
| Contamination degree | 3 |
| Approvals | KEMA KUR, EAC |

DIMENSIONS

| | |
|------------------|---------|
| Length | 97.5 mm |
| Width | 5.1 mm |
| Height TS 35/7.5 | 52.5 mm |

CONNECTION DATA

| | |
|------------------|-------|
| Connections | 2 x 3 |
| Number of levels | 2 |

| | |
|--|---------------------|
| Plug gauge acc. EN 60 947-1 | A3 |
| Cross connect channels | 2 |
| Cross section single wire from | 0.2 mm ² |
| Cross section single wire to | 4 mm ² |
| Cross section stranded wire from | 0.2 mm ² |
| Cross section stranded wire to | 4 mm ² |
| Cross section stranded with ferrule from | 0.2 mm ² |
| Cross section stranded with ferrule to | 2.5 mm ² |
| Rated wire cross section from (AWG) | 26 |
| Rated wire cross section to (AWG) | 14 |
| Stripping length | 12 mm |

MATERIALS

| | |
|----------------------------|---------------|
| Insulation material | Polyamide 6.6 |
| Flammability class | UL94-V0 |
| Operating temperature from | -40 °C |
| Operating temperature to | 120 °C |

APPROVALS

| | |
|-------------------------|-------------------|
| EAC test standard | TR ZU 004/2011 |
| KEMA KEUR test standard | EN 60947-7-1:2009 |

ADDITIONAL DATA

| | |
|-------------------|----------|
| Tariff code | 85369010 |
| Country of origin | CZ |
| Weight | 18.42 g |
| Pack size | 50 |