


FUSE TERMINALS - FTRK/FSIK

FTRK, FSIK

3292.4

FSIK 4/2A/LED 30-60V AC/DC BK

- For glass tube fuses 5x20
- For automotive fuses
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C

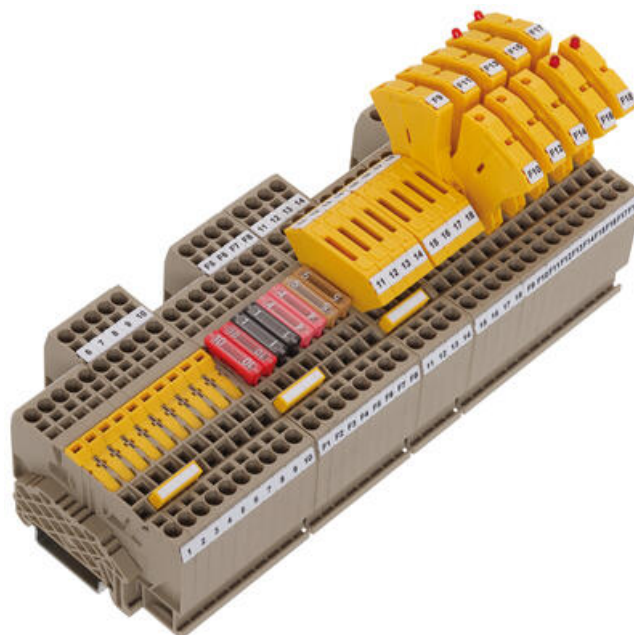

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Rated wire cross section	4 mm ²
Colour	Black
Rated current IEC	6.3 A
Fuse size	5 x 20 mm
Mounting	TS 35
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3
Approvals	UL, CSA, CSA US, KEMA KUR

DIMENSIONS

Length	67.5 mm
Width	6.1 mm
Height TS 35/7.5	70 mm
Height	69 mm

CONNECTION DATA

Connections	2
Number of levels	1
Plug gauge acc. EN 60 947-1	A3
Cross connect channels	1
Cross section single wire from	0.2 mm ²
Cross section single wire to	4 mm ²
Cross section stranded wire from	0.2 mm ²
Cross section stranded wire to	2.5 mm ²
Cross section stranded with ferrule from	0.2 mm ²
Cross section stranded with ferrule to	2.5 mm ²
Rated wire cross section from (AWG)	24
Rated wire cross section to (AWG)	10
Stripping length	12 mm

MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

APPROVALS

Rated voltage UL	300 V
Rated current UL	6.3 A
UL test standard	UL 1059
Rated voltage CSA	300 V
Rated current CSA	6.3 A
CSA test standard	C22.2 No 158
Rated voltage CSAus	300 V
Rated current CSAus	6.3 A
CSAus test standard	UL 1059
KEMA KEUR test standard	EN 60947-7-3:2009

ADDITIONAL DATA

Tariff code	85369010
Country of origin	DE
Weight	87.66 g

