
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

3 WIRE INITIATOR TERMINALS - FIK 2.5MM²

FIK

3296.2
FIK 2.5/3/LED, FIK 2.5/3, 2.5mm² Initiator terminal with Red LED (24VDC)

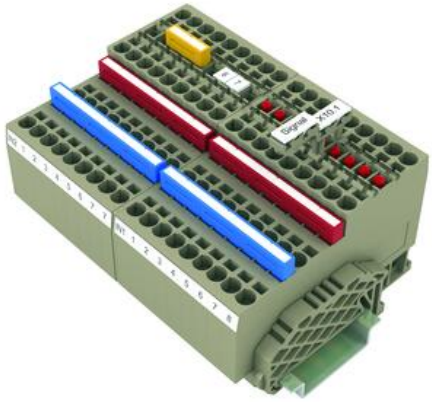

- Ideal for wiring sensors and acuators
- Pluggable cross connectors
- Easy to assemble
- Flexible marking options

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Rated wire cross section	2.5 mm²
Colour	Beige
Rated voltage IEC	24 V
Rated current IEC	24 A
Mounting	TS 35
Rated impulse voltage	4 kV
Overvoltage category	III
Contamination degree	3
Approvals	EAC
Additional information	with LED status display

DIMENSIONS

Length	72 mm
Width	5.1 mm
Height TS 35/7.5	48 mm
Height	47 mm

CONNECTION DATA

Connections	4
Number of levels	1
Plug gauge acc. EN 60 947-1	A3
Cross connect channels	3
Cross section single wire from	0.2 mm²
Cross section single wire to	4 mm²
Cross section stranded wire from	0.2 mm²
Cross section stranded wire to	4 mm²
Cross section stranded with ferrule from	0.2 mm²
Cross section stranded with ferrule to	2.5 mm²
Rated wire cross section from (AWG)	26
Rated wire cross section to (AWG)	12
Stripping length	12 mm

MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

APPROVALS

EAC test standard	TR ZU 004/2011

ADDITIONAL DATA

Tariff code	85369010
Country of origin	BG
Weight	12.5 g
Pack size	100