


MODULAR TERMINALS FOR 3-WIRE AND 4-WIRE DEVICES - ZIZA/ZMP

ZIZA, ZMP

3561.2

ZIZA 1.5/4/16/LED/PE, 4 wire, 16 way ZIZA block with earth, Red LED, Brown, Blue, Green/Yellow

- Modular connector system for 3- and 4-wire actuators
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0

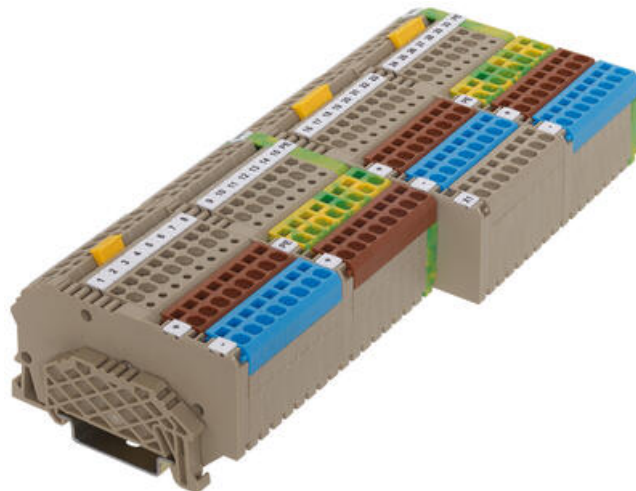

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Rated wire cross section	1.5 mm ²
Colour	Combination
Rated voltage IEC	400 V
Rated current IEC	17.5 A
Mounting	TS 35
Rated impulse voltage	4 kV
Overvoltage category	III
Contamination degree	3
Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR
Additional information	with LED status display

DIMENSIONS

Length	82.5 mm
Width	91.8 mm
Height TS 35/7.5	40.5 mm

CONNECTION DATA

Connections	5
Number of levels	1

Plug gauge acc. EN 60 947-1	A1
Cross connect channels	1
Number of test pick off options	0
Cross section single wire from	0.5 mm ²
Cross section single wire to	2.5 mm ²
Cross section stranded wire from	0.5 mm ²
Cross section stranded wire to	2.5 mm ²
Cross section stranded with ferrule from	0.5 mm ²
Cross section stranded with ferrule to	1.5 mm ²
Rated wire cross section from (AWG)	26
Rated wire cross section to (AWG)	14
Stripping length	8 mm

MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

APPROVALS

UL test standard	UL 1059
Rated voltage CSA	300 V
Rated current CSA	12.5 A
CSA test standard	C22.2 No 158
Rated voltage CSAus	300 V
Rated current CSAus	12.5 A
CSAus test standard	UL 1059
cUL test standard	C22.2 No 158
GL test standard	IEC 60947-7-1:2009, IEC 60947-7-2:2009
KEMA KEUR test standard	60947-7-1:2009, EN 60947-7-2:2009

ADDITIONAL DATA

Tariff code	85369010
Country of origin	DE
Weight	7.8 g

