


MODULAR TERMINALS FOR 3-WIRE AND 4-WIRE DEVICES - ZIZA/ZMP

ZIZA, ZMP

3791.8
ZPL 1.5, Contact block - Yellow

- Modular connector system for 3- and 4-wire actuators
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0

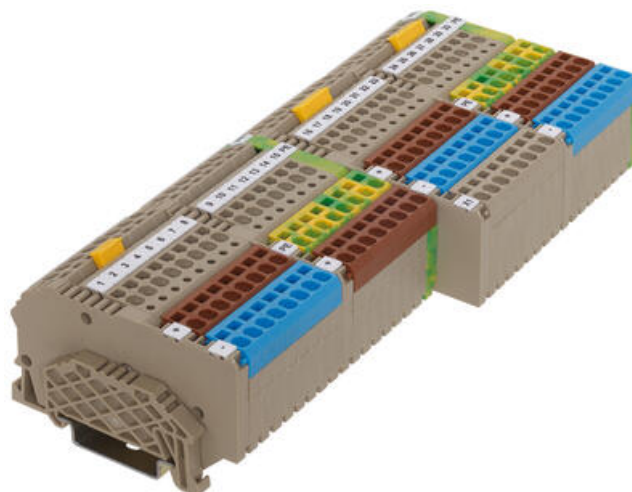

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Rated wire cross section	1.5 mm ²
Colour	Yellow
Rated voltage IEC	400 V
Rated current IEC	17.5 A
Mounting	Push in
Rated impulse voltage	4 kV
Overvoltage category	III
Contamination degree	3
Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR, EAC

DIMENSIONS

Length	12.9 mm
Width	8.7 mm
Height TS 35/7.5	17.5 mm

CONNECTION DATA

Connections	1
Plug gauge acc. EN 60 947-1	A1
Number of poles	1

Cross section single wire from	0.5 mm ²
Cross section single wire to	2.5 mm ²
Cross section stranded wire from	0.5 mm ²
Cross section stranded wire to	2.5 mm ²
Cross section stranded with ferrule from	0.5 mm ²
Cross section stranded with ferrule to	1.5 mm ²
Rated wire cross section from (AWG)	26
Rated wire cross section to (AWG)	14
Stripping length	8 mm

MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

APPROVALS

Rated voltage UL	300 V
Rated current UL	12.5 A
UL test standard	UL 1059
Rated voltage CSA	300 V
Rated current CSA	12.5 A
CSA test standard	C22.2 No 158
Rated voltage CSAus	300 V
Rated current CSAus	12.5 A
CSAus test standard	UL 1059
cUL test standard	C22.2 No 158
GL test standard	IEC 60947-7-1:2009
EAC test standard	TR ZU 004/2011
KEMA KEUR test standard	EN 60947-7-1:2009

ADDITIONAL DATA

Tariff code	85369010
Country of origin	CZ
Weight	1.26 g
Pack size	100

