
**OEM Automatic Ltd**
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

# DISCONNECT TERMINALS - TRK, STK/K

TK, STK/K, STKD/K

1401.2
DS 2/TRK 1.5, Disconnect plug for TRK 1.5, Diode

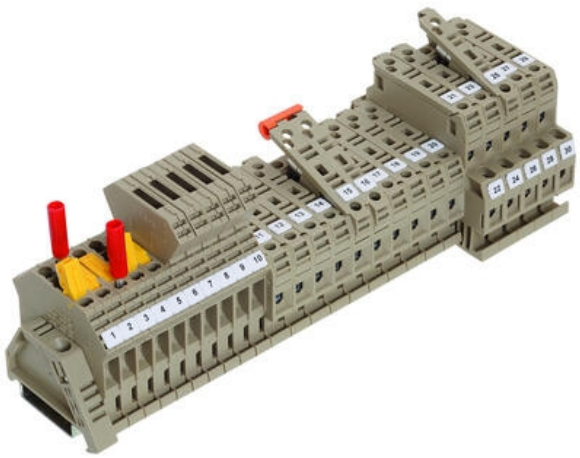

- Material polyamide 6.6
- Temperature resistance -40 ºC...+105 ºC
- Flammability class V2
- Removable plug option
- Fuse solid links

## PRODUCT DESCRIPTION

Disconnect terminals are commonly used within measurement and control systems. They are ideal for when troubleshooting electrical circuits, when commissioning new systems or refurbishing existing installations.

This series come with a combi-foot for installation on TS 32/TS 35 rails or with a snap-on foot for the TS 15 DIN rail.

The TRK 1.5 is available as a 'blade type' disconnect or with a removable disconnect plug that can be removed and retained by the user to prevent accidental activation.

**Features of the TRK 1.5/TRK 1.5 DS**

- Same construction as the standard terminal blocks
- A sturdy, closed insulation housing
- The established disconnect-blade with high-quality surfaces
- Minimal and stable level of contact resistance
- Touch-safe protection also during the disconnect

**There are 4 -types of DS plugs**

- Disconnect without  circuitry
- Disconnect plug with wire jumper
- Disconnect plug  with blocking diode
- Disconnect plug with pass through diode

STB Versions offers the advantage of a 4mm test socket for pick-off.

TK & STK/K versions are low profile and come with a hinged lever for disconnecting and a contact sleev.

**Features of the TK and STK../K**

Same construction as the standard terminal fuse blocks

- Hinged lever latches into fully open position.
- Disconnect terminals can be used as fuse-disconnect terminals by changing the sleeve (KH5 and KH6.3) to a fuse
- STKD1/K includes a feed through connection

# TECHNICAL DATA

## GENERAL DATA

| | |
|---|---|
| **Colour** | Yellow |
| **Rated voltage IEC** | 1000 V |
| **Rated current IEC** | 1 A |
| **Diode type** | 1N4007 |
| **Mounting** | Push in |
| **Overvoltage category** | III |
| **Contamination degree** | 3 |
| **Additional information** | with diode 1N4007 |

## ADDITIONAL DATA

| | |
|---|---|
| **Tariff code** | 85369010 |
| **Country of origin** | BG |
| **Weight** | 3.87 g |
| **Pack size** | 1 |
| **Type of terminal** | Screw Terminals, DIN Rail terminals |