
**OEM Automatic Ltd**
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

# FEED THROUGH TERMINALS - ZRK 2.5-16 MM²

Tension Spring Terminals - ZRK

3597.2
ZRK 10/2A Beige, 10mm² Tension spring, feed through

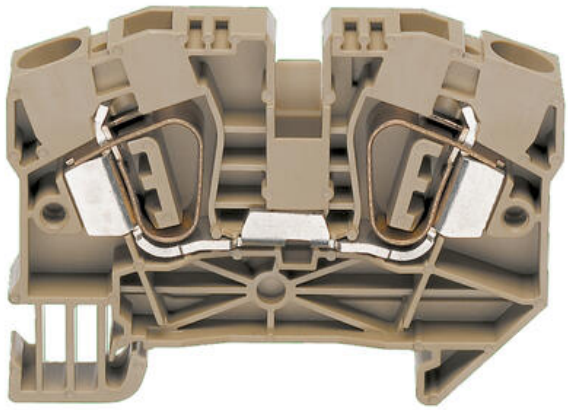

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0
- 2, 3 & 4 connections

## PRODUCT DESCRIPTION

The tension spring range of terminals for wire cross-sections from 0.2 mm² to 16 mm² includes: the **ZRK/ZSL** series of feed-through and PE terminals, the double-level **ZRKD/ZSLD**, the **ZIKD** three-level terminal blocks, motor-connection terminals, (blade) disconnect terminals, fused terminals, direct-mount terminals, and initiator/actuator terminals for transmitting positioning, encoder and sensors signals.
Tension spring technology is ideal for high vibration applications and will save up to 50% of the time against a traditional screw terminal.

# TECHNICAL DATA

## GENERAL DATA

| | |
|---|---|
| **Rated wire cross section** | 10 mm² |
| **Colour** | Beige |
| **Rated voltage IEC** | 1000 V |
| **Rated current IEC** | 57 A |
| **Load current max** | 57 A |
| **Mounting** | TS 35 |
| **Rated impulse voltage** | 8 kV |
| **Overvoltage category** | III |
| **Contamination degree** | 3 |
| **Approvals** | UL, CSA, CSA US, KEMA KUR, EAC |

## DIMENSIONS

| | |
|---|---|
| **Length** | 73.5 mm |
| **Width** | 10.1 mm |
| **Height TS 35/7.5** | 50.5 mm |

## CONNECTION DATA

| | |
|---|---|
| **Connections** | 2 |
| **Number of levels** | 1 |
| **Plug gauge acc. EN 60 947-1** | B6 |
| **Cross connect channels** | 2 |
| **Number of test pick off options** | 2 |
| **Cross section single wire from** | 1.5 mm² |
| **Cross section single wire to** | 16 mm² |
| **Cross section stranded wire from** | 1.5 mm² |
| **Cross section stranded wire to** | 10 mm² |
| **Cross section stranded with ferrule from** | 1.5 mm² |
| **Cross section stranded with ferrule to** | 10 mm² |
| **Rated wire cross section from (AWG)** | 16 |
| **Rated wire cross section to (AWG)** | 6 |
| **Stripping length** | 18 mm |

## MATERIALS

| | |
|---|---|
| **Insulation material** | Polyamide 6.6 |

| | |
|---|---|
| **Flammability class** | UL94-V0 |
| **Operating temperature from** | -40 °C |
| **Operating temperature to** | 120 °C |

## APPROVALS

| | |
|---|---|
| **Rated voltage UL** | 500 V |
| **Rated current UL** | 55 A |
| **UL test standard** | UL 1059 |
| **Rated voltage CSA** | 500 V |
| **Rated current CSA** | 55 A |
| **CSA test standard** | C22.2 No 158 |
| **Rated voltage CSAus** | 500 V |
| **Rated current CSAus** | 55 A |
| **CSAus test standard** | UL 1059 |
| **EAC test standard** | TR ZU 004/2011 |
| **KEMA KEUR test standard** | EN 60947-7-1:2009 |

## ADDITIONAL DATA

| | |
|---|---|
| **Tariff code** | 85369010 |
| **Country of origin** | CZ |
| **Weight** | 26 g |
| **Pack size** | 50 |

