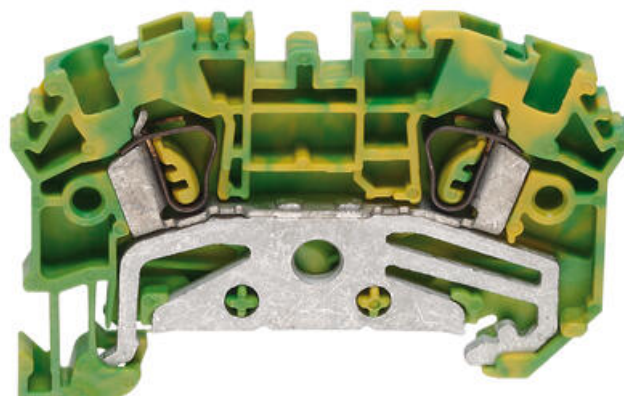


**EARTH TERMINALS - ZSL 2.5-16MM<sup>2</sup>**

ZSL, ZSLD

3526.2  
ZSL 4/3A GNYE

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

**PRODUCT DESCRIPTION****TECHNICAL DATA****GENERAL DATA**

|                          |                                         |
|--------------------------|-----------------------------------------|
| Rated wire cross section | 4 mm <sup>2</sup>                       |
| Colour                   | Green/yellow                            |
| Mounting                 | TS 35                                   |
| Overvoltage category     | III                                     |
| Contamination degree     | 3                                       |
| Approvals                | UL, CSA, GL, CSA US, cUL, KEMA KUR, EAC |

**DIMENSIONS**

|                  |         |
|------------------|---------|
| Length           | 78.5 mm |
| Width            | 6.1 mm  |
| Height TS 35/7.5 | 42 mm   |

**CONNECTION DATA**

|                                 |                     |
|---------------------------------|---------------------|
| Connections                     | 3                   |
| Number of levels                | 1                   |
| Plug gauge acc. EN 60 947-1     | A4                  |
| Cross connect channels          | 0                   |
| Number of test pick off options | 2                   |
| Cross section single wire from  | 0.5 mm <sup>2</sup> |
| Cross section single wire to    | 6 mm <sup>2</sup>   |

|                                          |                     |
|------------------------------------------|---------------------|
| Cross section stranded wire from         | 0.6 mm <sup>2</sup> |
| Cross section stranded wire to           | 6 mm <sup>2</sup>   |
| Cross section stranded with ferrule from | 0.5 mm <sup>2</sup> |
| Cross section stranded with ferrule to   | 4 mm <sup>2</sup>   |
| Rated wire cross section from (AWG)      | 20                  |
| Rated wire cross section to (AWG)        | 10                  |
| Stripping length                         | 12 mm               |

MATERIALS

|                            |               |
|----------------------------|---------------|
| Insulation material        | Polyamide 6.6 |
| Flammability class         | UL94-V0       |
| Operating temperature from | -40 °C        |
| Operating temperature to   | 120 °C        |

APPROVALS

|                         |                    |
|-------------------------|--------------------|
| UL test standard        | UL 1059            |
| CSA test standard       | C22.2 No 158       |
| CSAus test standard     | UL 1059            |
| cUL test standard       | C22.2 No 158       |
| GL test standard        | IEC 60947-7-2:2009 |
| EAC test standard       | TR ZU 004/2011     |
| KEMA KEUR test standard | EN 60947-7-2:2009  |

ADDITIONAL DATA

|                   |          |
|-------------------|----------|
| Tariff code       | 85369010 |
| Country of origin | CZ       |
| Weight            | 18 g     |
| Pack size         | 100      |

