


FUSE TERMINALS - ZTRK 2.5MM², OT/ZS

ZTRK/OT, ZTRK/ZS

3635.2
 ZS/H0/ZTR

- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0
- Current limited by an automotive fuse 10 A

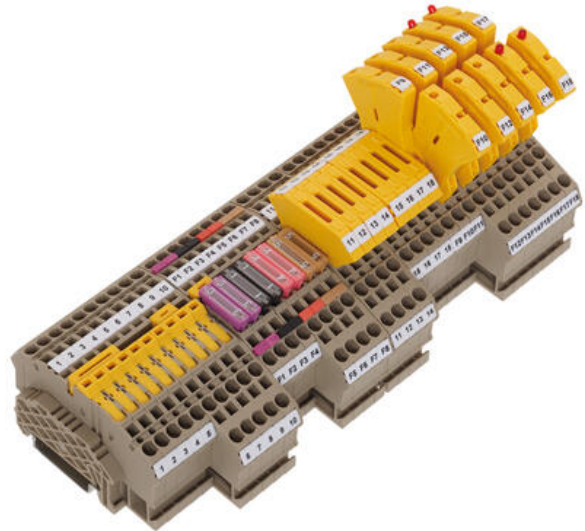

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Colour	Yellow
Fuse size	5 x 20 mm
Rated impulse voltage	4 kV
Overvoltage category	III
Contamination degree	3
Approvals	CSA, CSA US
Additional information	without status display

MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

APPROVALS

Rated voltage CSA	300 V
Rated current CSA	10 A
CSA test standard	C22.2 No 158

Rated voltage CSAus	300 V
Rated current CSAus	10 A
CSAus test standard	UL 1059

ADDITIONAL DATA

Tariff code	85369010
Country of origin	DE
Weight	6.55 g
Pack size	20