


## MODULAR TERMINALS FOR 3-WIRE AND 4-WIRE DEVICES - ZIZA/ZMP

ZIZA, ZMP

3596.2  
ZMP 1.5 BG, Base terminal for ZMP 4 way distribution  
system

- Modular connector system for 3- and 4-wire actuators
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0

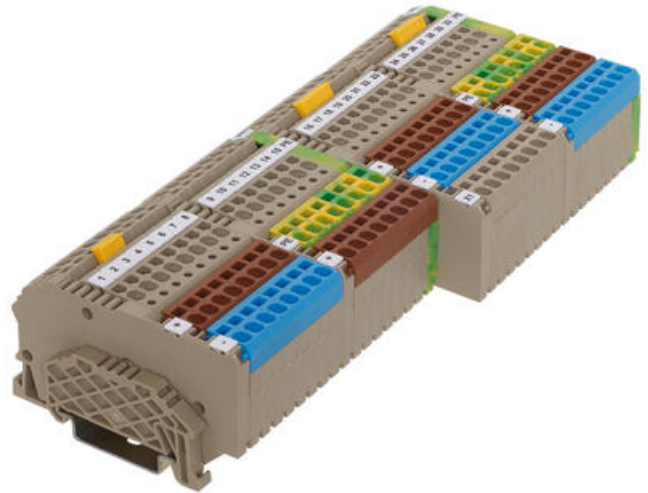

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

|                          |                                |
|--------------------------|--------------------------------|
| Rated wire cross section | 1.5 mm <sup>2</sup>            |
| Colour                   | Beige                          |
| Rated voltage IEC        | 400 V                          |
| Rated current IEC        | 17.5 A                         |
| Mounting                 | TS 35                          |
| Rated impulse voltage    | 4 kV                           |
| Overvoltage category     | III                            |
| Contamination degree     | 3                              |
| Approvals                | UL, CSA, CSA US, KEMA KUR, EAC |

#### DIMENSIONS

|                  |         |
|------------------|---------|
| Length           | 68.7 mm |
| Width            | 5.1 mm  |
| Height TS 35/7.5 | 40.5 mm |

#### CONNECTION DATA

|                  |      |
|------------------|------|
| Connections      | 4    |
| Stripping length | 8 mm |

#### MATERIALS

|                                   |               |
|-----------------------------------|---------------|
| <b>Insulation material</b>        | Polyamide 6.6 |
| <b>Flammability class</b>         | UL94-V0       |
| <b>Operating temperature from</b> | -40 °C        |
| <b>Operating temperature to</b>   | 120 °C        |

## APPROVALS

|                                |                   |
|--------------------------------|-------------------|
| <b>Rated voltage UL</b>        | 400 V             |
| <b>Rated current UL</b>        | 12.5 A            |
| <b>UL test standard</b>        | UL 1059           |
| <b>Rated voltage CSA</b>       | 400 V             |
| <b>Rated current CSA</b>       | 12.5 A            |
| <b>CSA test standard</b>       | C22.2 No 158      |
| <b>Rated voltage CSAus</b>     | 400 V             |
| <b>Rated current CSAus</b>     | 12.5 A            |
| <b>CSAus test standard</b>     | UL 1059           |
| <b>EAC test standard</b>       | TR ZU 004/2011    |
| <b>KEMA KEUR test standard</b> | EN 60947-7-1:2009 |

## ADDITIONAL DATA

|                          |          |
|--------------------------|----------|
| <b>Tariff code</b>       | 85369010 |
| <b>Country of origin</b> | CZ       |
| <b>Weight</b>            | 6.1 g    |
| <b>Pack size</b>         | 50       |