


## DOUBLE DECK TERMINALS - PRKD/PSLD 2.5 - 4MM<sup>2</sup>

PRKD, PSLD

27038.6  
PRKD 2.5/SV Grey, 2.5mm<sup>2</sup> linked double deck  
terminal

- Push In technology
- Linked options
- Colour marked versions
- 1 in 2 out 4mm<sup>2</sup> version
- Earth variants

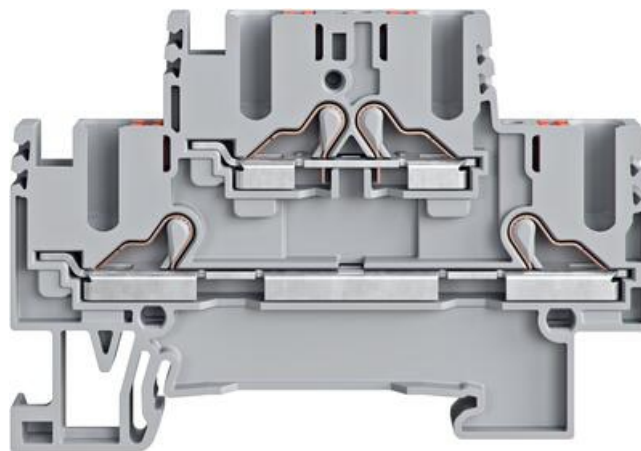

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

Rated wire cross section	2.5 mm <sup>2</sup>
Colour	Grey
Rated voltage IEC	500 V
Rated current IEC	22 A
Mounting	Mounting rail TS 35/7.5
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3
Additional information	connected vertically

#### DIMENSIONS

Length	68.7 mm
Width	5.1 mm
Height TS 35/7.5	47.2 mm
Height	45.7 mm

#### CONNECTION DATA

Connections	4
Number of levels	2

Plug gauge acc. EN 60 947-1	A3
Cross connect channels	2
Cross section single wire from	0.14 mm <sup>2</sup>
Cross section single wire to	4 mm <sup>2</sup>
Cross section stranded wire from	0.14 mm <sup>2</sup>
Cross section stranded wire to	2.5 mm <sup>2</sup>
Cross section stranded with ferrule from	0.14 mm <sup>2</sup>
Cross section stranded with ferrule to	2.5 mm <sup>2</sup>
Rated wire cross section from	26 AWG
Rated wire cross section to	12 AWG
Stripping length	10 mm

### MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

### ADDITIONAL DATA

Tariff code	85369010
Country of origin	CZ
Weight	10.53 g
Pack size	50
Number of terminals per level	2

