


MINIATURE TERMINALS TS15/32/35 - RK 1.5-4, SRK 2.5

RK1.5-4, SRK 2.5

1058.2

SLN2.5/35, 2.5mm² Compact Earth, clamped

- Compact - ideal for small enclosures
- TS15/TS32 & TS35 range
- up to 4mm² cables
- cross connectable
- Polyimide 6.6-V2

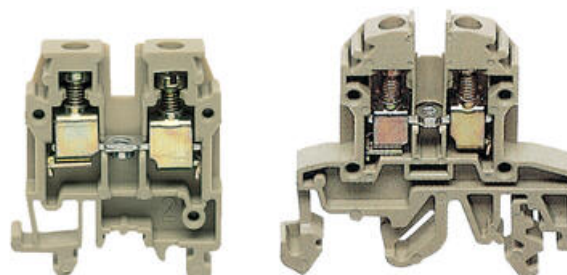

PRODUCT DESCRIPTION

This mixed range of compact terminals is ideal for applications where space is at a premium.
The SRK2.5/15 range is the most compact, sitting only 29.5mm high when mounted on TS15 rail.

Alternatively, if you do not want din rail mounted terminals, the BKA rang are also compact, but can be mounted directly in the enclosure or back plate.

TECHNICAL DATA

GENERAL DATA

Rated wire cross section	2.5 mm ²
Colour	Green/yellow
Mounting	TS 35
Overvoltage category	III
Contamination degree	3
Approvals	UL, cUL, NEMKO, EAC

DIMENSIONS

Length	52 mm
Width	6 mm
Height TS 35/7.5	38.9 mm

CONNECTION DATA

Connections	2
Number of levels	1
Plug gauge acc. EN 60 947-1	A3

Cross section single wire from	0.2 mm ²
Cross section single wire to	4 mm ²
Cross section stranded wire from	0.2 mm ²
Cross section stranded wire to	4 mm ²
Cross section stranded with ferrule from	0.2 mm ²
Cross section stranded with ferrule to	2.5 mm ²
Rated wire cross section from (AWG)	22
Rated wire cross section to (AWG)	12
Stripping length	10 mm
Screw size	M 2,5
Screw type	Slotted
Torque min	0.4
Torque max	0.8

MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V2
Operating temperature from	-40 °C
Operating temperature to	105 °C

APPROVALS

UL test standard	UL 1059
cUL test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011

ADDITIONAL DATA

Tariff code	85369010
Country of origin	CZ
Weight	16.9 g
Pack size	100
Nemko test standard	EN 60947-7-2:2002

