


PLUG-IN CONNECTION SYSTEM - ZST

ZRKS, ZSTK

3678.3

ZSTK 2.5/1A/1S-H/B, Horizontal Inline coupling plug,
Orange

- Wire connection type: tension-spring connection
- Versatile mounting on TS15, TS35 or as free coupling
- Ratings 500 V, 24 A
- Touch-safe construction

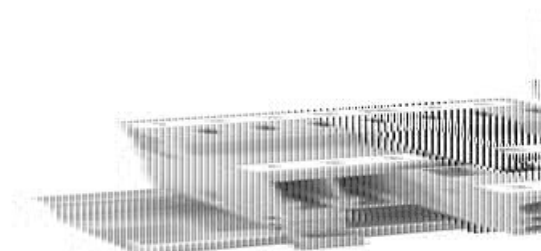

PRODUCT DESCRIPTION

The plug-in connection system ZST is a plug-in system that allows you to achieve a rated current up to 24 A with a rated voltage up to 500 V.

The terminals and the pluggable connectors have a touch-safe design and can be configured easily and combined according to the particular needs of your application.

The basic terminals and connectors can also be coded to make sure the correct plug is mated with the correct socket, when using multiple sets.

All plugs & base terminals have the option of additional snap-on locking latches and strain relief mechanism to ensure that the connected wire and plugs are firmly secured

The ZSTK 2.5 couplings are available as rail-mounted version (for TS15 and TS35) or as a free coupling.

TECHNICAL DATA

GENERAL DATA

| | |
|--------------------------|-------------------------------------|
| Rated wire cross section | 2.5 mm ² |
| Colour | Orange |
| Rated voltage IEC | 500 V |
| Rated current IEC | 24 A |
| Mounting | Push in |
| Rated impulse voltage | 6 kV |
| Overvoltage category | III |
| Contamination degree | 3 |
| Approvals | UL, CSA, CSA US, cUL, KEMA KUR, EAC |

DIMENSIONS

| | |
|--------|--------|
| Length | 40 mm |
| Width | 5.1 mm |
| Height | 19 mm |

CONNECTION DATA

| | |
|--|---------------------|
| Connections | 2 |
| Number of levels | 1 |
| Plug gauge acc. EN 60 947-1 | A3 |
| Cross connect channels | 0 |
| Number of test pick off options | 1 |
| Number of poles | 1 |
| Cross section single wire from | 0.5 mm ² |
| Cross section single wire to | 4 mm ² |
| Cross section stranded wire from | 0.5 mm ² |
| Cross section stranded wire to | 4 mm ² |
| Cross section stranded with ferrule from | 0.5 mm ² |
| Cross section stranded with ferrule to | 2.5 mm ² |
| Rated wire cross section from (AWG) | 20 |
| Rated wire cross section to (AWG) | 12 |
| Stripping length | 10 mm |

MATERIALS

| | |
|----------------------------|---------------|
| Insulation material | Polyamide 6.6 |
| Flammability class | UL94-V0 |
| Operating temperature from | -40 °C |

| | |
|--------------------------|--------|
| Operating temperature to | 120 °C |
|--------------------------|--------|

APPROVALS

| | |
|-------------------------|-------------------|
| Rated voltage UL | 300 V |
| Rated current UL | 20 A |
| UL test standard | UL 1059 |
| Rated voltage CSA | 300 V |
| Rated current CSA | 20 A |
| CSA test standard | C22.2 No 158 |
| Rated voltage CSAus | 300 V |
| Rated current CSAus | 20 A |
| CSAus test standard | UL 1059 |
| Rated voltage cUL | 300 V |
| Rated current cUL | 20 A |
| cUL test standard | C22.2 No 158 |
| EAC test standard | TR ZU 004/2011 |
| KEMA KEUR test standard | EN 60947-7-1:2009 |

ADDITIONAL DATA

| | |
|-------------------|----------|
| Tariff code | 85369010 |
| Country of origin | DE |
| Weight | 4.26 g |
| Pack size | 100 |

