


DOUBLE DECK TERMINALS - PRKD/PSLD 2.5 - 4MM²

PRKD, PSLD

27073.5

PRKD 4/3A Blue, 4mm² Double deck terminal, 1 in 2 out

- Push In technology
- Linked options
- Colour marked versions
- 1 in 2 out 4mm² version
- Earth variants

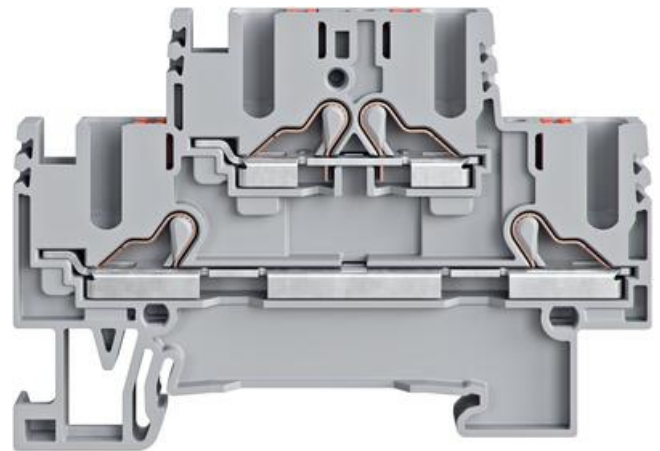

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Rated wire cross section	4 mm ²
Colour	Blue
Rated voltage IEC	500 V
Rated current IEC	28 A
Mounting	Mounting rail TS 35/7.5
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3

DIMENSIONS

Length	103 mm
Width	6.1 mm
Height TS 35/7.5	47.5 mm
Height	47.5 mm

CONNECTION DATA

Connections	2 x 3
Number of levels	2
Plug gauge acc. EN 60 947-1	A4
Cross connect channels	2

Cross section single wire from	0.34 mm ²
Cross section single wire to	6 mm ²
Cross section stranded wire from	0.34 mm ²
Cross section stranded wire to	6 mm ²
Cross section stranded with ferrule from	0.34 mm ²
Cross section stranded with ferrule to	4 mm ²
Rated wire cross section from	22 AWG
Rated wire cross section to	10 AWG
Stripping length	12 mm

MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

ADDITIONAL DATA

Tariff code	85369010
Country of origin	CZ
Weight	18 g
Pack size	50
Number of terminals per level	2