


ETHERNET AND USB INTERFACE MODULES

RJ, RJU, RJS, USB, IX-SH

16493.2
 IX-A-SH, IX Industrial Ethernet breakout module with shield connection, CAT5 (100 Mbps), Push in terminals, Type A connector

- Compact
- RJ 45 Shielded versions
- USB A/B
- Industrial Ethernet
- 2 -Wire Single Pair Ethernet

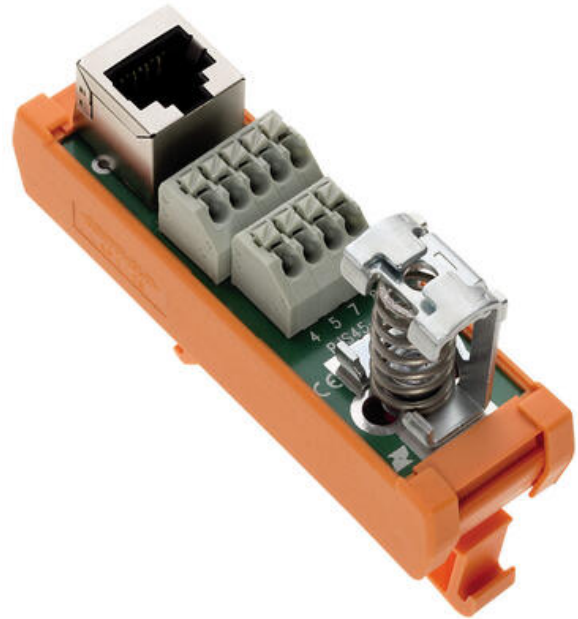

PRODUCT DESCRIPTION

This range of interface modules use the standardized RJ45 Ethernet and USB connectors from computer components, Ethernet ready devices or modems and have screw PCB terminals for easy connection.

The RJS45-SH is even more compact and uses push in connectors and has the added spring shield clip for locally grounding the cable.

New additions to the range include the Industrial SPE (Single Pair Ethernet) interface with spring shield clip and the IX Industrial Ethernet.

TECHNICAL DATA

GENERAL DATA

| | |
|-----------------------|---------|
| Connector type | IX |
| Connection type | Push-in |
| Number of connections | 1 |
| Number of poles | 8 |
| Shielded | Yes |
| Category | CAT 5 |

DIMENSIONS

| | |
|--------|-------|
| Length | 87 mm |
| Width | 26 mm |

CONNECTION DATA

| | |
|---|-------------------------------|
| Cross section single wire from | 0.14 mm ² |
| Cross section stranded with ferrule to | 0.5 mm ² |
| Cross section single wire to | 1 mm ² |
| Cross section stranded with ferrule from | 0.14 mm ² |
| Stripping length | 9 mm |
| Contact material | Cu-Sn-P 1.27 µm Au 1.27 µm Ni |
| Cable diameter min | 3 mm |
| Cable diameter max | 8 mm |

RATINGS

| | |
|--|-------------------------|
| Operating voltage ac/dc max | 60 V |
| Current carrying capacity per channel max | 1 A |
| DIN-VDE Spec | DIN VDE 0110 / EN 50178 |
| Overvoltage category | III |
| Contamination degree | 2 |
| Test voltage eff | 0.75 kV |
| Operating temperature from | -40 °C |
| Operating temperature to | 85 °C |

ADDITIONAL DATA

| | |
|--------------------------|----------|
| Tariff code | 85369010 |
| Country of origin | NL |
| Weight | 48 g |
| Pack size | 1 |

