

NA5PLUS, NA6PLUS

Universal input digital panel meter with multicolour bargraphs.

NA5PLUSMGU00200E0
DIGITAL BARGRAPH METER 7 COLOUR GREEN 95-253VAC/DC

- Universal input (programmable)
- Wide voltage, AC/DC control
- Digital and digital bargraph multicolour display



PRODUCT DESCRIPTION


Meters with bargraph are devices ensuring both a high measurement accuracy and very well visualization of the measuring process courses. Very well visualization of the process is possible through using in meters 3 and 7-coloured bargraph built with diodes made in the gallium nitride technology. They can find application in various industrial fields, e.g. food industry, pumping stations and sewage-treatment plants, chemical industry, weather stations, brewing industry and many other fields where they are destined for visualisation of the measured value and evaluation of the monitored manufacturing process change trend. They can also find application in automation systems where programmable controllers are applied.












Please refer to the image below for ordering information.



NASPLUS ordering code:											NA6PLUS ordering code:										
NASPLUS -											NA6PLUS -										
Bargraph colour:											Bargraph colour:										
3-colour (R, G, R+G)											3-colour(R, G, R+G)										
7-colour(R, G, B, R+G, R+B, G+B, R+G+B)											7-colour (R, G, B, R+G, R+B, G+B, R+G+B)										
Display colour:											Display colour on channels 1 and 2:										
red											red-red										
green											red-green										
custom-made*											green-red										
Input signal:											Input signal:										
universal input											universal input										
custom-made*											custom-made*										
Analog output:											Analog output:										
lack											lack										
0/4...20mA											0/4...20mA										
0...10 V											0...10 V										
2 x 0/4...20 mA											2 x 0/4...20 mA										
2 x 0...10 V											2 x 0...10 V										
1 x 0/4...20 mA, 1 x 0...10 V											1 x 0/4...20 mA, 1 x 0...10 V										
Additional output:											Additional output:										
lack											lack										
4 relays											4 relays										
8 outputs of OC type											8 outputs of OC type										
Supply voltage:											Supply voltage:										
95...253 V a.c./d.c.											95...253 V a.c./d.c.										
20...40 V a.c., 20...60 V d.c.											20...40 V a.c., 20...60 V d.c.										
Kind of terminals:											Kind of terminals:										
screwed plug-in sockets											screwed plug-in sockets										
Version:											Version:										
standard											standard										
custom-made*											custom-made**										
Language:											Language:										
Polish											Polish										
English											English										
other*											other*										
Acceptance tests:											Acceptance tests:										
without extra requirements											without extra requirements										
with an extra quality inspection certificate											with an extra quality inspection certificate										
acc. to customer's request											acc. to customer's request**										

TECHNICAL DATA

Approvals	EN61010-1
Bargraph colour	7 Colour (R, G, B, R+G, R+B, G+B, R+G+B)
Display colour	Green
IP class	IP50
Mounting	Panel mount
Supply voltage	95-253VAC/DC
Weight	0.4 kg

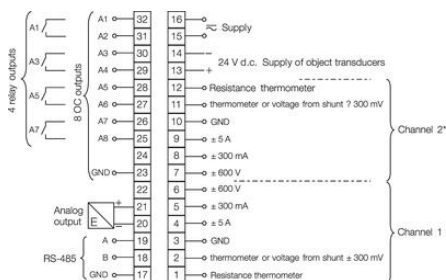

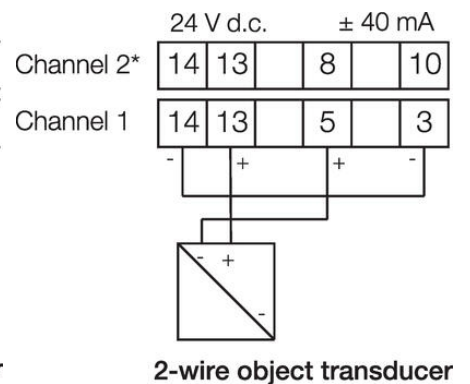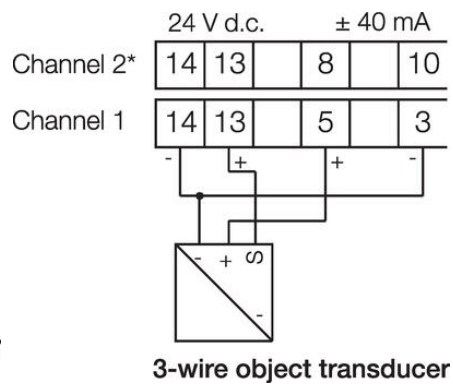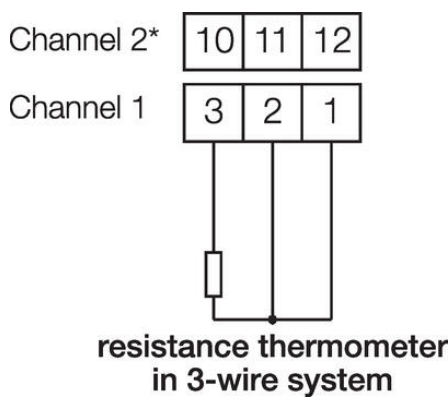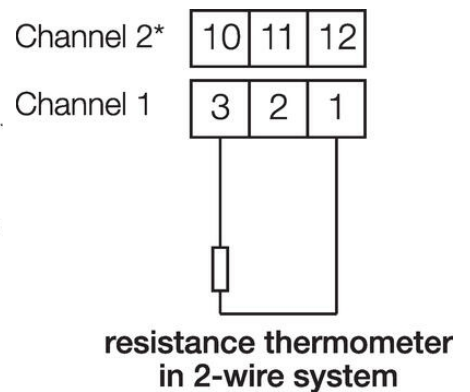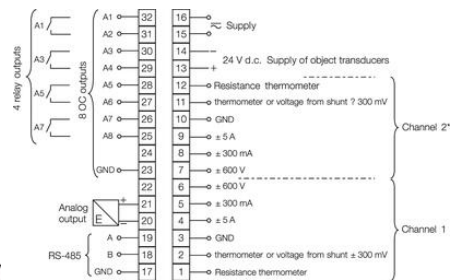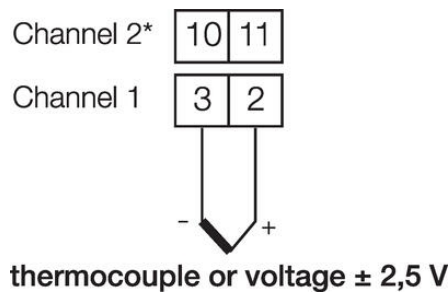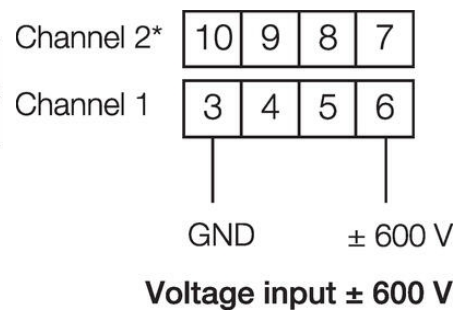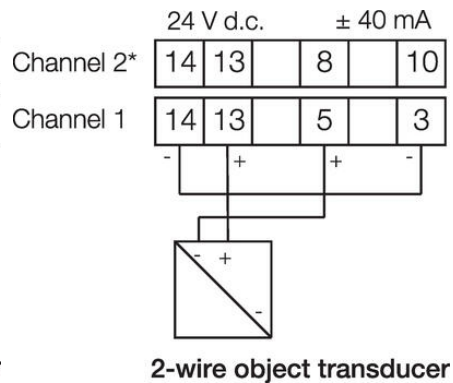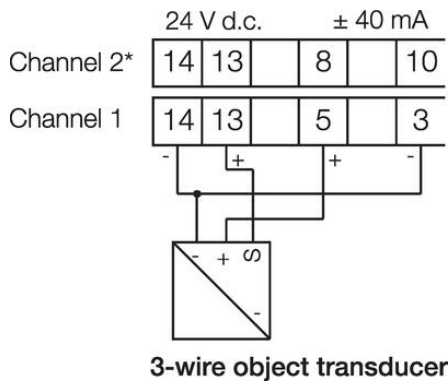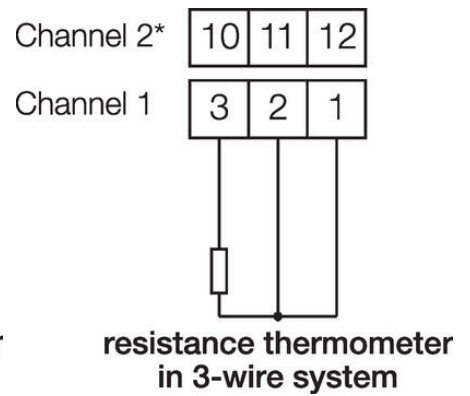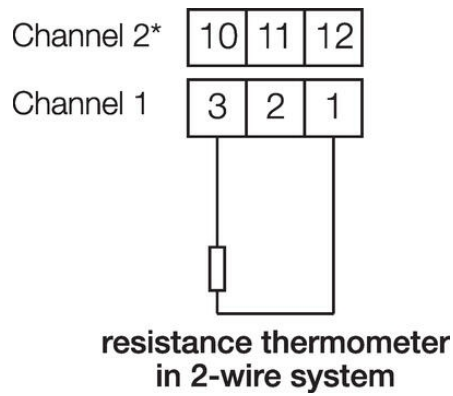

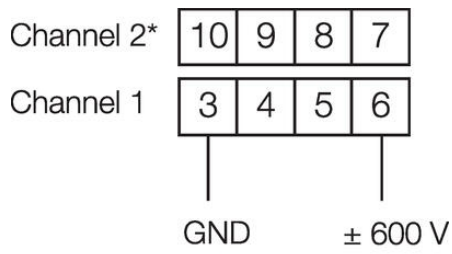

Voltage input $\pm 600\text{ V}$ thermocouple or voltage $\pm 2,5\text{ V}$