OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

NAFSA - ERC SERIES

ERC45-50-15/C
ERC45-50-15/C



- Pull / push design, with optional spring
- Class B winding (130ºC)
- Duty cycle 0 to 100%
- Up to 191N force
- Customer specific version available

PRODUCT DESCRIPTION

The ERC series of electromagnets are a double acting push/pull solenoid.

When an electrical connection is made to to coil, the plunger moves through the magnetic field and pushes the shaft along its designated stroke.


Upon removing the electrical connection, the shaft remains in position and is returned with reverse polarity or optional return spring.

Many different standard versions are available (please see catalogue PDF below) and application specific designs can be provided for larger volume requirements.

TECHNICAL DATA

Absorbed power @ 20°C, 100% duty	12 W
Absorbed power @ 20°C, 15% duty	77 W
Absorbed power @ 20°C, 25% duty	46 W
Absorbed power @ 20°C, 40% duty	29 W
Absorbed power @ 20°C, 5% duty	228 W
Beginning of stroke force at 100% duty	45 N
Beginning of stroke force at 15% duty	16 N
Beginning of stroke force at 25% duty	12 N
Beginning of stroke force at 40% duty	93 N
Beginning of stroke force at 5% duty	32 N
End of stroke force at 100% duty	16 N
End of stroke force at 15% duty	50 N

End of stroke force at 25% duty	42 N
End of stroke force at 40% duty	33 N
End of stroke force at 5% duty	83 N
Function	pull/push
Insulation class	B(130ºC)
IP class	IP00
Spring return	Yes
Stroke	15 mm
Total weight	297 g
Voltage ac max	230 V
Voltage ac min	110 V
Voltage dc max	205 V
Voltage dc min	6 V
Voltage type	AC, DC

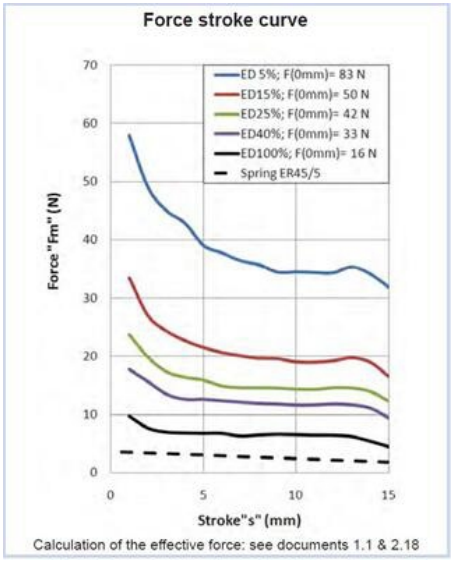

Duty-cycle ED(%)	100	40	25	15	5
Abs. Power at 20ºC (W)	12	29	46	77	228
Minimum force (N)	4.5	9.3	12	16	32
Max time under voltage(s)	∞	60	38	23	8
Plunger weight (g)	52				
Solenoid weight (g)	297				

