

NAFSA - ECH SERIES

ECH65-15
ECH65-15

- Pull / push design, with optional spring
- Class B winding (130°C)
- Duty cycle 0 to 100%
- Up to 2800N force
- Customer specific version available



PRODUCT DESCRIPTION

The ECH series is simple linear solenoid where the stroke movement from start to final position is made by the electromagnetic forces.

Return to start position is done by external forces or from a spring built into the solenoid.


Featuring a plug in connector, the main body and electrical connector on the ECH series offers IP65 sealing.

The shaft mounting faces are IP40 and offer fixing locations with smooth surfaces for external sealing, depending on the application.

TECHNICAL DATA

Absorbed power @ 20°C, 100% duty	30 W
Absorbed power @ 20°C, 15% duty	185 W
Absorbed power @ 20°C, 25% duty	110 W
Absorbed power @ 20°C, 40% duty	75 W
Absorbed power @ 20°C, 5% duty	545 W
Beginning of stroke force at 100% duty	46 N
Beginning of stroke force at 15% duty	118 N
Beginning of stroke force at 25% duty	91 N
Beginning of stroke force at 40% duty	73 N
Beginning of stroke force at 5% duty	177 N
End of stroke force at 100% duty	152 N
End of stroke force at 15% duty	303 N
End of stroke force at 25% duty	252 N
End of stroke force at 40% duty	199 N

End of stroke force at 5% duty	385 N
Function	push/pull
Insulation class	B(130°C)
IP class of solenoid body and connector	IP40
IP class of solenoid mounting face	IP65
Stroke	15 mm
Total weight	1700 g
Voltage ac max	230 V
Voltage ac min	110 V
Voltage dc max	205 V
Voltage dc min	6 V
Voltage type	AC, DC

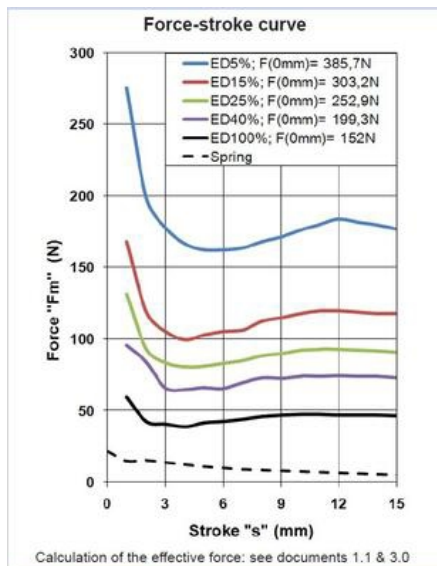

Duty-cycle	Standard voltages										Under demand voltages			
ED%	VDC							VAC			VDC		VAC	
	6	12	24	48	100	125	205		110	230	Min	Max	Min	Max
100%	x	o	o	o	o	o	o	o	o	o	25	330	230	330
40%	x	o	o	o	o	o	o	o	o	o	12	120	98	230
25%	x	x	o	o	o	o	o	o	o	o	15	250	143	230
15%	x	x	o	o	o	o	o	o	x	o	19	250	185	230
5%	x	x	o	o	o	o	o	x	x	x	24	250	x	x
Layout:	o = Available ; x = Unavailable													

