


NAFSA - ERDI SERIES

ERDI15

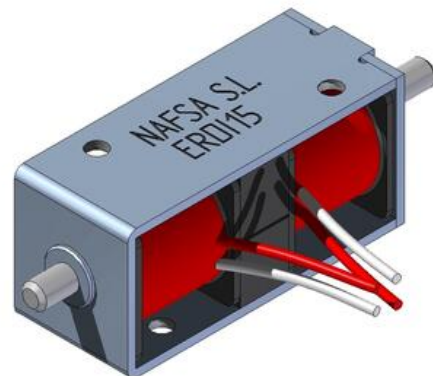

- Dual rest positions held with permanent magnet
- Class E winding (120°C)
- High starting force
- Up to 24N force
- Customer specific version available

**PRODUCT DESCRIPTION**


The ERDI range has two resting positions, moving from one to another by a polarized signal.

The plunger is held at each position by permanent magnets.

TECHNICAL DATA

Duty cycle	33 %
Function	push/pull
Insulation class	E (120°C)
IP class	IP00
Power	9 W
Stroke	5 mm
Total weight	40 g
Voltage dc max	12 V
Voltage dc min	6 V
Voltage type	DC

Force-stroke Curve (F-S)

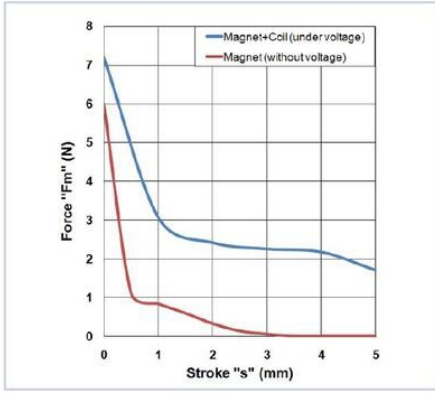

Dimensionnal drawing:

