


NAFSA - ERDI SERIES

ERDI35-06/CC

- Dual rest positions held with permanent magnet
- Class E winding (120°C)
- High starting force
- Up to 24N force
- Customer specific version available

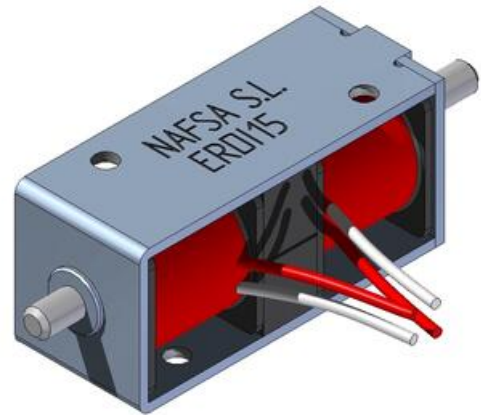

PRODUCT DESCRIPTION

The ERDI range has two resting positions, moving from one to another by a polarized signal.

The plunger is held at each position by permanent magnets.

TECHNICAL DATA

Duty cycle	20 %
Function	push/pull
Insulation class	Y (90°C)
IP class	IP40
Power	28 W
Stroke	6 mm
Total weight	175 g
Voltage dc max	48 V
Voltage dc min	6 V
Voltage type	DC

