OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

NAFSA - CU20 CPXU SERIES

CU20/CPXU
Nafsa solenoid CU20/CP XU24VdcED100%

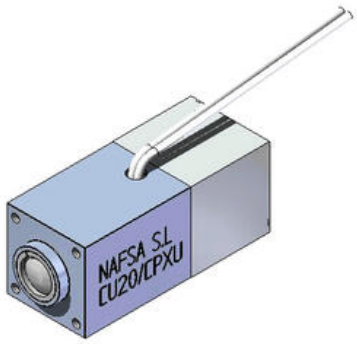

- Security locking bolt
- Class B winding (130ºC)
- Positive detection options
- Up to 0.35N force
- Customer specific version available

PRODUCT DESCRIPTION

This locking bolt is a linear solenoid, reinforced to cope with extra external forces.

It has a front mounting and locks under voltage.

TECHNICAL DATA

Beginning of stroke force at 100% duty	0.35 N
Duty cycle	100 %
Insulation class	B(130ºC)
IP class	IP40
Plunger weight	17 g
Return spring force	0.7 N
Stroke	10 mm
Temperature rise	70 °C
Total weight	90 g
Voltage dc max	48 V
Voltage dc min	6 V

