


## NAFSA - ERC30 CP SERIES

### ERC30/CP

- Reinforced locking bolt
- Class B winding (130°C)
- Locks without power
- Up to 6.7N return force
- Customer specific version available

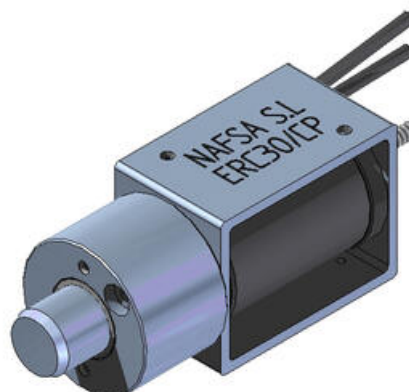

### PRODUCT DESCRIPTION

A reinforced version of the ERC range, with a front guide to ensure smooth guidance under loading.

Voltage applied to open and closure takes place when the voltage is removed.

Designed for 100% duty.

### TECHNICAL DATA

Absorbed power @ 20°C, 100% duty	8 W
Absorbed power @ 20°C, 25% duty	25 W
Duty cycle	100 %
Insulation class	B(130°C)
IP class	IP00
Plunger weight	38 g
Return spring force	6.7 N
Stroke	8 mm
Temperature rise	70 °C
Total weight	215 g
Voltage ac max	230 V
Voltage ac min	230 V
Voltage dc max	205 V
Voltage dc min	12 V

**Solenoid shown under voltage**

