


NAFSA - C30 SERIES

C30

- Locking bolt with key
- Class F winding (155°C)
- Ideal for electrical isolation
- Customer specific version available

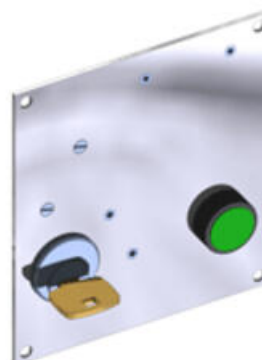

PRODUCT DESCRIPTION

The C30 is a complete panel assembly featuring a bolt that is locked with no voltage by means of a spring.

Applying a voltage by turning the key unlocks the bolt.

The key cannot be removed in the locked position, and the microswitch terminal block outlet can be provided for normally open, closed or combined - depending on customers requirements.

Please check the security and safety aspects of any machine build before use of this components.

TECHNICAL DATA

Duty cycle	100 %
Insulation class	F(155° C)
IP class	IP00
Total weight	600 g
Voltage ac max	220 V
Voltage ac min	220 V
Voltage dc max	125 V
Voltage dc min	24 V

