OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

MRS LINEAR GUIDE

MRS30-1200
MRS Sliding Type, 1200mm, 30 Holes, 468g, Aluminium Alloy, Static Rated Load



- Does not need grease
- Very compact
- high corrosion resistance


PRODUCT DESCRIPTION


The Sugatsune MRS Sliding Type is a high-performance sliding door system designed to deliver smooth, quiet, and reliable operation. Featuring a compact, low-profile design, it offers a clean, minimalist aesthetic ideal for modern interiors. Precision-engineered with ball-bearing rollers, the MRS system ensures effortless and silent movement, even with heavier door panels. Its construction emphasises both durability and functionality, making it suitable for high-traffic environments in residential, commercial, and architectural settings.
This versatile system includes adjustable components for easy installation across various door sizes and configurations. Many models in the MRS line also incorporate soft-close technology, enhancing user safety and delivering a refined closing motion. Whether used in cabinetry, closet doors, or room partitions, the Sugatsune MRS Sliding Type exemplifies Japanese craftsmanship, providing a seamless blend of form and function for design-conscious projects.

TECHNICAL DATA

Feature	MRS Sliding Type
Guide Block Screw Size	M4
Horizontal Load FX	520 N
Load Moment MX	5 Nm
Load Moment MY	2.5 Nm
Load Moment MZ	2.5 Nm
Load Type	Static Rated Load
Material	Aluminium alloy
Number of holes	30
Rail & Guide Block Height	11 mm
Rail & Guide Block Width	30 mm
Rail Hole Pitch	40 mm
Rail Length	1200 mm
Rail Screw Size	M4
Rail Width	30 mm
Surface finish	Silver Anodised
Vertical Load FY	305 N
Weight	468 g

Load Direction



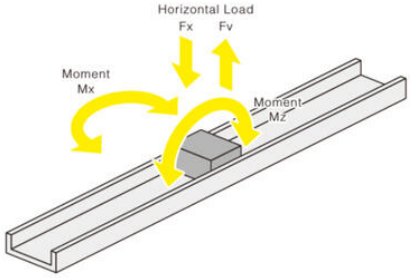

Load Direction

