OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

SCRW LINEAR SLIDE

SCRW2-15-80A
Stainless Steel 2 Way Mini Slide, 80mm, 48.5mm travel

- 3/4 Extension
- Slim Profile
- Smooth movement due to unique design
- Bidirectional Movement




PRODUCT DESCRIPTION


The SCRW-15 Mini Slide from Sugatsune is a compact, stainless-steel drawer slide designed for smooth, precise movement in tight spaces. With a slim profile and ¾-extension range, it allows controlled sliding motion in both directions and is pre-lubricated with food-grade grease for hygienic applications. Its simple, no-detent design makes it ideal for installations where a clean look and smooth function are essential.
Thanks to its corrosion-resistant construction, the SCRW-15 is well-suited for demanding environments such as kitchens, medical equipment, marine fittings, and compact furniture. It's a reliable choice for applications requiring a small yet sturdy slide, offering long-lasting performance in places where space and cleanliness matter most.


TECHNICAL DATA

Back Travel Length	48.5 mm
Feature	Two Way Draw Slide
Front Travel Length	48.5 mm
Height	15.5 mm
Load Capacity Per Pair	137 N
Material	Stainless steel, Steel
Rail Length	80 mm
Rail Width	5.2 mm
Weight	21 g

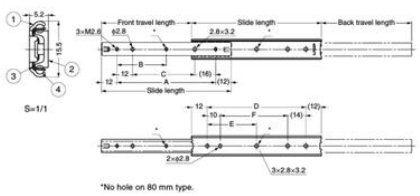

No.	Part Name	Material
①	Outer Rail	Stainless Steel (SUS304)
②	Inner Rail	Stainless Steel (SUS304)
③	Retainer	Stainless Steel (SUS304)
④	Balls	Steel



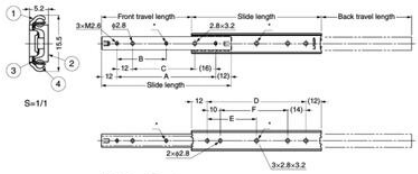

*No hole on 80 mm type.

No.	Part Name	Material
①	Outer Rail	Stainless Steel (SUS304)
②	Inner Rail	Stainless Steel (SUS304)
③	Retainer	Stainless Steel (SUS304)
④	Balls	Steel

Item Code	Item Name	Slide Length	Front Travel Length	Back Travel Length	A	B	C	D	E	F	Load Capacity N	Load Capacity kgf	Weight	Box	Carton
190-026-620	SCRW2-15-80A	80	48.5	48.5	56	–	28	56	–	32	137 N/pair	14 kgf/pair	21 g	200 pcs	400 pcs
190-026-621	SCRW2-15-100A	100	68.5	68.5	76	38	48	76	38	52	157 N/pair	16 kgf/pair	26 g	200 pcs	400 pcs
190-026-622	SCRW2-15-150A	150	94.5	94.5	126	63	98	126	63	102	177 N/pair	18 kgf/pair	41 g	100 pcs	200 pcs