

## SCRL-15S LINEAR SLIDE

SCRL2-15S-100A

Fully Stainless Steel Mini Guide, 100mm, 59mm Travel

- Small Deflection Suitable For Various Places
- Fully Stainless Steel
- Various Lengths Available




### PRODUCT DESCRIPTION

The SCRL2-15S is a fully stainless steel mini-guide linear slide with an ultra-slim 15.5 mm profile and low deflection, perfect for tight installation spaces. Crafted from SUS 304 stainless steel and equipped with smooth ball-bearing action, the slide comes pre-lubricated using NSF H1 registered food-grade grease, ideal for hygienic environments. It's available in a range of closed lengths (80 mm, 100 mm, 150 mm, 200 mm), with load capacities varying from approximately 18 kg to 24 kg per pair and features side-mount, non-handed design compliant with RoHS 3.

Practically, the SCRL2-15S excels wherever space is at a premium and cleanliness matters, such as in food-processing equipment, laboratory drawers, medical carts, and marine or industrial cabinetry. Its stainless construction ensures strong corrosion resistance and easy maintenance, while the slim form enables elegant, discrete integration into compact applications like point-of-sale devices, instrument panels, and compact storage systems.


### TECHNICAL DATA

Feature	Mini Guide
Height	15.5 mm
Load Capacity Per Pair	206 N
Material	Stainless steel
Rail Length	100 mm
Rail Width	5.2 mm
Travel Length	59 mm
Weight	20 g

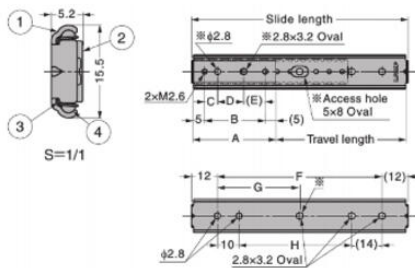

No.	Part Name	Material
①	Outer Member	Stainless Steel (SUS304)
②	Inner Member	
③	Retainer	
④	Balls	Stainless Steel (SUS440)

Item	Item Code	Item Name	Slide Length	Travel Length	A	B	C	D	E	F	G	H	Vertical Installation Load Capacity (N)	Weight (g)	Box (pcs)	Carton (pcs)
10	100-034-809	SCRLD-155-80A	80	49	23	18	-	-	56	-	32	177	18	-	-	-
10	100-034-810	SCRLD-155-100A	100	59	34	28	4	12	70	38	52	206	21	-	-	-
10	100-034-811	SCRLD-155-150A	150	109	84	59	4	12	126	63	102	235	24	-	-	-
10	100-034-812	SCRLD-155-200A	200	149	114	114	114	114	114	114	114	235	24	-	-	-

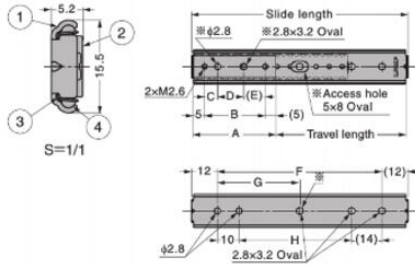

No.	Part Name	Material
①	Outer Member	Stainless Steel (SUS304)
②	Inner Member	
③	Retainer	
④	Balls	Stainless Steel (SUS440)

Item	Item Code	Item Name	Slide Length	Travel Length	A	B	C	D	E	F	G	H	Vertical Installation Load Capacity (N)	Weight (g)	Box (pcs)	Carton (pcs)
10	100-034-809	SCRLD-155-80A	80	49	23	18	-	-	56	-	32	177	18	-	-	-
10	100-034-810	SCRLD-155-100A	100	59	34	28	4	12	70	38	52	206	21	-	-	-
10	100-034-811	SCRLD-155-150A	150	109	84	59	4	12	126	63	102	235	24	-	-	-
10	100-034-812	SCRLD-155-200A	200	149	114	114	114	114	114	114	114	235	24	-	-	-