OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

SCRL-15S LINEAR SLIDE

SCRL2-15S-150A
Fully Stainless Steel Mini Guide, 150mm, 109mm Travel

- Small Deflection Suitable For Various Places
- Fully Stainless Steel
- Various Lengths Available




PRODUCT DESCRIPTION

The SCRL2-15S is a fully stainless steel mini-guide linear slide with an ultra-slim 15.5 mm profile and low deflection, perfect for tight installation spaces. Crafted from SUS 304 stainless steel and equipped with smooth ball-bearing action, the slide comes pre-lubricated using NSF H1 registered food-grade grease, ideal for hygienic environments. It's available in a range of closed lengths (80 mm, 100 mm, 150 mm, 200 mm), with load capacities varying from approximately 18 kg to 24 kg per pair and features side-mount, non-handed design compliant with RoHS 3.
Practically, the SCRL2-15S excels wherever space is at a premium and cleanliness matters, such as in food-processing equipment, laboratory drawers, medical carts, and marine or industrial cabinetry. Its stainless construction ensures strong corrosion resistance and easy maintenance, while the slim form enables elegant, discrete integration into compact applications like point-of-sale devices, instrument panels, and compact storage systems.


TECHNICAL DATA

Feature	Mini Guide
Height	15.5 mm
Load Capacity Per Pair	206 N
Material	Stainless steel
Rail Length	150 mm
Rail Width	5.2 mm
Travel Length	109 mm
Weight	29 g

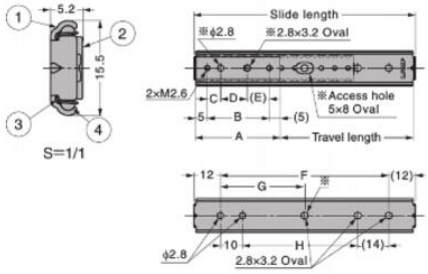

No.	Part Name	Material
①	Outer Member	Stainless Steel (SUS304)
②	Inner Member	
③	Retainer	
④	Balls	Stainless Steel (SUS440)

Mark	CAD	Item Code	Item Name	Slide Length	Travel Length	A	B	C	D	E	F	G	H	Vertical Installation		Weight (g/pc)	Box (pcs)	Carton (pcs)
														Load Capacity N(set)	Load Capacity kgf(set)			
Try	DL	190-034-809	SCRL2-15S-80A	80	49	28	18	–	–	–	56	–	32	177	18	16	–	–
Try	DL	190-034-810	SCRL2-15S-100A	100	59	38	28	8	12	10	76	38	52	206	21	20	–	–
Try	DL	190-034-811	SCRL2-15S-150A	150	109						126	63	102			29	–	–
Try	DL	190-034-812	SCRL2-15S-200A	200	149	48	38	10	14	14	176	88	152	235	24	38	–	–

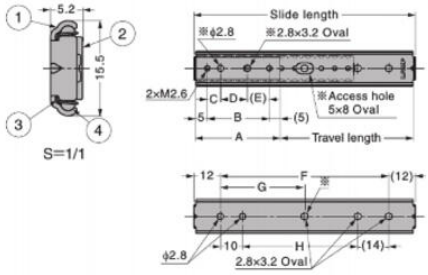

No.	Part Name	Material
①	Outer Member	Stainless Steel (SUS304)
②	Inner Member	
③	Retainer	
④	Balls	Stainless Steel (SUS440)

Mark	CAD	Item Code	Item Name	Slide Length	Travel Length	A	B	C	D	E	F	G	H	Vertical Installation		Weight (g/pc)	Box (pcs)	Carton (pcs)
														Load Capacity N(set)	Load Capacity kgf(set)			
Try	DL	190-034-809	SCRL2-15S-80A	80	49	28	18	–	–	–	56	–	32	177	18	16	–	–
Try	DL	190-034-810	SCRL2-15S-100A	100	59	38	28	8	12	10	76	38	52	206	21	20	–	–
Try	DL	190-034-811	SCRL2-15S-150A	150	109						126	63	102			29	–	–
Try	DL	190-034-812	SCRL2-15S-200A	200	149	48	38	10	14	14	176	88	152	235	24	38	–	–