
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

FUSE MODULES SM

Fuse Modules - SM

5716.2
SM 3-G, 3 way Fuse Module, 5 x 20mm fuse - Common feed

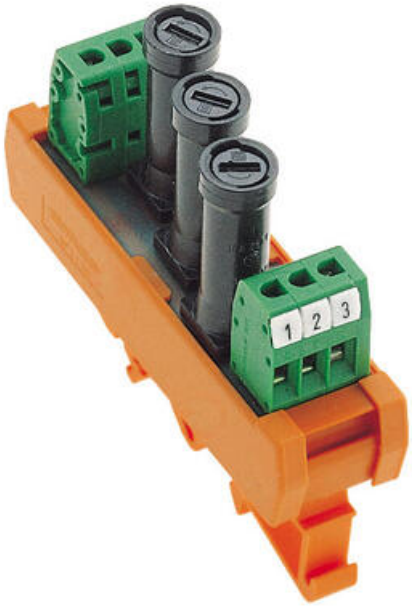

- Compact TS35/32 Mount
- 3 or 6 Fuse versions
- Screw Connection

PRODUCT DESCRIPTION

The SM fuse modules are designed with three or six mini screw top fuse holders.
Each fuse has its own separate input and output screw PCB terminals.
The fuse holders are design to hold 5 x 20mm fuses.
In the ...G designs, the inputs for the fuse holders are connected to each other via the PCB. This allows for a shared power supply.

TECHNICAL DATA

GENERAL DATA

Number of channels	3
Common feed-in	Yes
Fuse size	5x20

RATINGS

Current carrying capacity per channel max	4 A
Operating voltage ac/dc max	250 V
Rated current	6.3 A
Contamination degree	2
Overvoltage category	III
Operating temperature from	-20 °C
Operating temperature to	50 °C

DIN-VDE Spec	DIN VDE 0110 / EN50178

DIMENSIONS

Length	87 mm
Width	24 mm
Height TS 35/7.5	77 mm

CONNECTION DATA

Connection type	Screw
Torque	0.6
Cross section stranded with ferrule from	0.2 mm²
Cross section stranded with ferrule to	2.5 mm²
Cross section stranded wire from	0.2 mm²
Cross section stranded wire to	2.5 mm²
Cross section single wire from	0.2 mm²
Cross section single wire to	2.5 mm²
Stripping length	7 mm

ADDITIONAL DATA

Tariff code	85363010
Country of origin	EEC
Weight	56 g
Pack size	1