

PHOTONEO PHOXI 3D-SENSOR

3S-SBXL-3AF0F
PhoXi 3D Scanner XL Gen2

- Resolution up to 3,2M 3D point
- Gigabit Ethernet Interface
- Factory calibrated, easy to integrate
- Light and durable carbon body
- Low temperature expansion coefficient



PRODUCT DESCRIPTION


Photoneo develops advanced 3D scanners based on the NVIDIA Pascal Architecture GPU with 256 CUDA cores.

The PhoXi series is available in five different sizes, which means that there is a scanner for all types of applications. With a user-friendly API, you can quickly and easily set up and adapt it for your particular application. PhoXi uses the "advanced structured light approach" which allows it to scan all types of surfaces.

- Absolute accuracy = The precision of point measurement
- Z-noise = Noise in depth
- Frame rate = Max number of frames per second
- Data acquisition time = How long it takes to collect data. It depends on, among other things, the lighting conditions or whether it is a shiny object or not.
- 3D points throughput = The number of 3D points that can be created when doing a sequential scan
- Point size = The distance between two measurement points

TECHNICAL DATA


Calibration accuracy (1 σ)	0.5 mm
DC input	PoE & 24V
Depth	68 mm
GPU	NVIDIA Pascal Architecture GPU (256 CUDA cores)
Height	77 mm
IP class	IP65
Optimal scanning distance	2326 mm
Point to point distance	0.947 mm
Scanning area at sweet spot	1954 x 1459 mm
Scanning range max	3780 mm
Scanning range min	1680 mm
Scanning time	250 – 3000 ms
Temporal noise (1 σ)	0.4 mm
Weight	1200 g

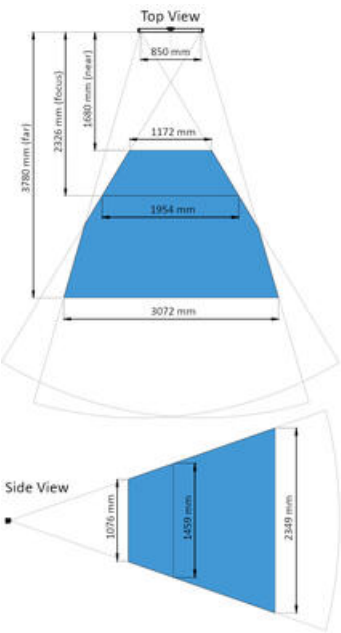

1 LÄDA IN 2D-MODELL



2 SKANNA EN 2D-BILD




3 FÅ UT KORDINATER FÖR PLUCKBARA OBJEKT



1 LÄDA IN 2D-MODELL



2 SKANNA EN 2D-BILD



3 FÅ UT KORDINATER FÖR PLUCKBARA OBJEKT