

## DATALOGIC - S7 - FIBRE OPTIC AMPLIFIER

S7-4-E-P  
 950551110 Fibre Amplifier PNP White LED

- The first fibre amplifier produced in Europe
- Small size - only 10 mm wide
- Down to 50µs response time
- Easy to use







### PRODUCT DESCRIPTION

The S7 high resolution amplifiers are suggested for the detection of small objects through the use of a fibre optic cable. They are best used in confined spaces or hard to reach applications. They can also be used in presence of high temperature, with the sensor mounted inside the application and the amp outside.






### TECHNICAL DATA

<b>Approvals</b>	CE, UL
<b>Dimension (mm)</b>	10 x 65 x 40
<b>Electrical connection</b>	M8 4-pole connector
<b>IP class</b>	IP65
<b>LED indicator</b>	Yes
<b>Light type</b>	White LED
<b>Material of body</b>	ABS plastic
<b>Output</b>	PNP
<b>Output current max</b>	0.1 A
<b>Photocell technology</b>	Fiber amplified
<b>Power consumption max</b>	0.05 A
<b>Reaction time</b>	0.05 ms
<b>Sensitivity setting</b>	Yes

<b>Sensitivity setting</b>	Teach in/Remote via cable
<b>Storage temperature max</b>	70 °C
<b>Storage temperature min</b>	-25 °C
<b>Supply voltage</b>	12-24 V DC
<b>Temperature operational max</b>	55 °C
<b>Temperature operational min</b>	-10 °C
<b>Type of light</b>	LED
<b>Weight</b>	30 g

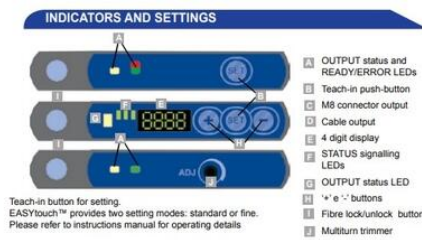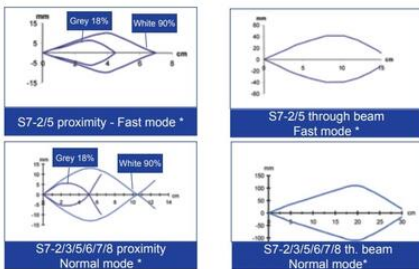

\* NC OUTPUT for S7-7/8 models

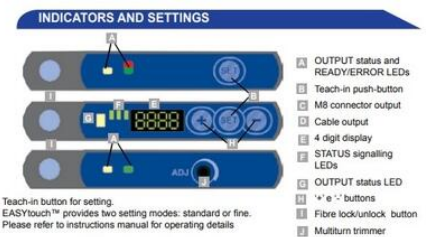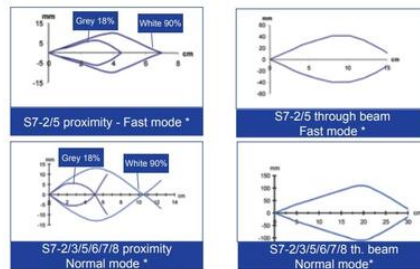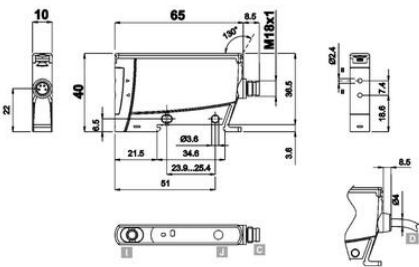

\* NC OUTPUT for S7-7/8 models

