OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

CYLINDER LOCK 18,56.5MM

241556
Cylinder lock 56.5mm, Keyed alike IL101, Standard nut, Black coated



- 18 or 56.5mm lock housing
- IP54
- 180°
- Incl. 2 keys

PRODUCT DESCRIPTION


Cylinder lock with 90° rotation and universal design with a hole that enables clockwise or counter-clockwise rotation when opening / locking. Supplied with nut. Sealed to protection class IP54. Comes with two keys. Master key system supplied upon request.


Please note that rule is ordered separately. Choose: rule with notches, three-point rule or hook rule.


TECHNICAL DATA


Configurable	No
Material cylinder	Stainless steel AISI 304, Zinc
Material lock housing	Zinc, black powder coated
Material nut	Zinc plated, Zinc
Material terminal	Zinc plated, Steel



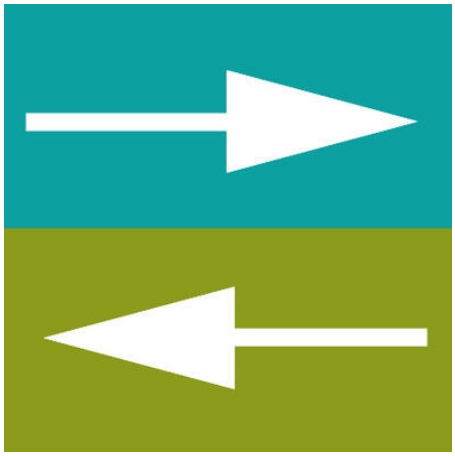


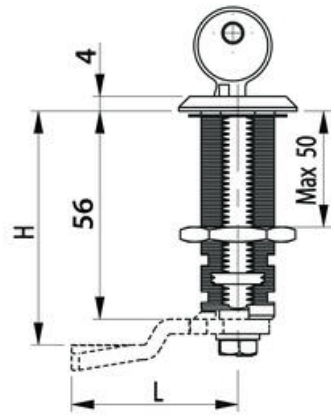




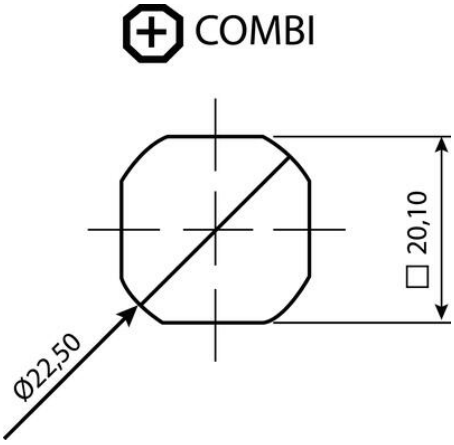
COMBI
□ 20,10
Ø22,50


IP54

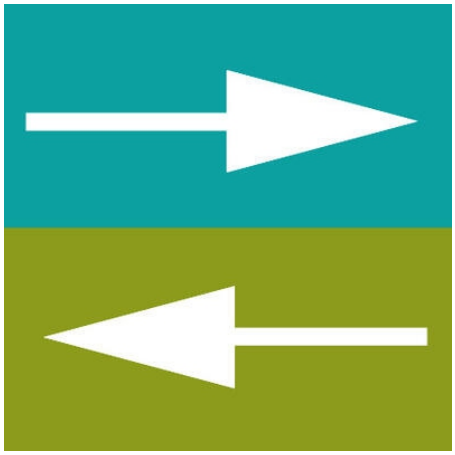

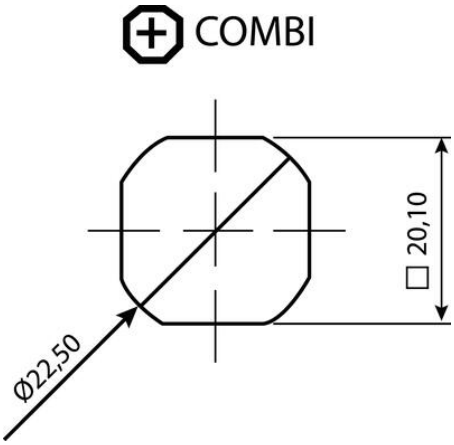
COMBI
□ 20,10
Ø22,50