OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

EXTERNAL HINGE 50X76MM 180°

3216-620764-30
External hinge 50x76mm, 180°, 2xM6 bolts, 2x6.3 holes




- Surface-mounted
- Countersunk holes and/or cast bolts
- Zinc, with black powder coating
- Hole pattern: 30x56 mm

PRODUCT DESCRIPTION


The hinge is mainly zinc with powder coating.
Hinge shaft & pin bolt are made of stainless steel.
For mounting with a nut on the cast-in stainless steel studs and/or with a screw in the countersunk holes.
Universal right or left mounting. Opening angle max. 180°.

TECHNICAL DATA


Bolt	2 x M6
Hole	2 x Ø6,3
Material	Zinc, black powder coated
Material bolt	Stainless steel 303
Material of shaft	Stainless steel 303
Opening angle	180 °

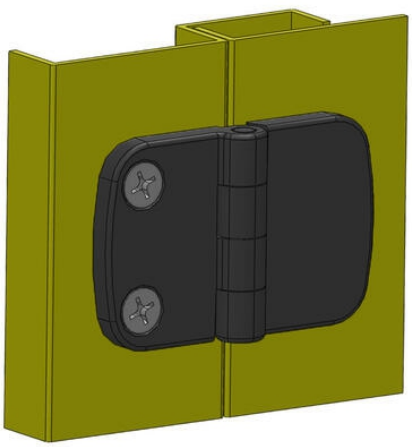





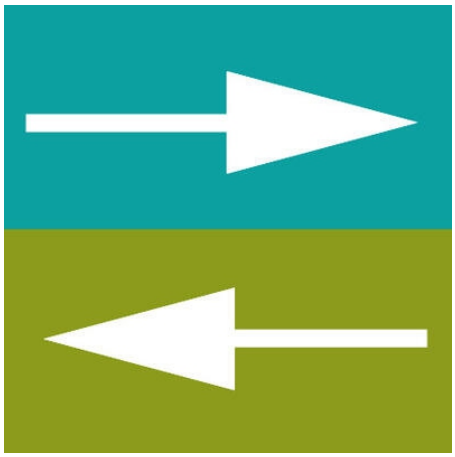


C




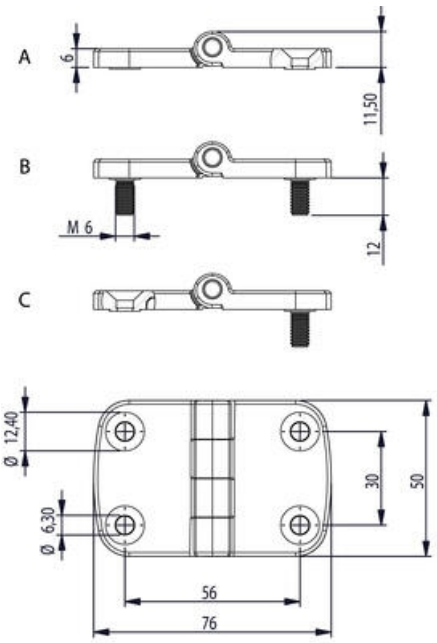
A
6
11,50
B
M 6
12
C
Ø 12,40
Ø 6,30
30
50
56
76

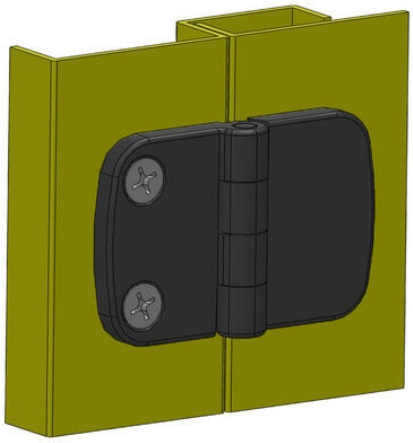


DIN EN
61373

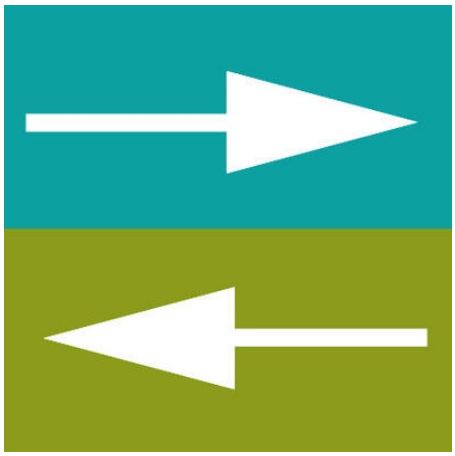

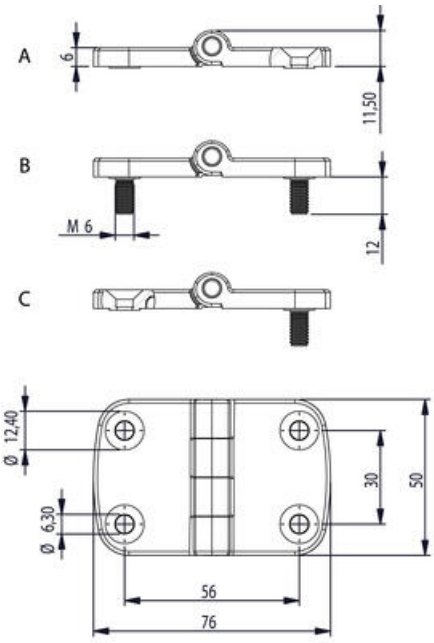
A
6
11,50
B
M 6
12
C
Ø 12,40
Ø 6,30
30
50
56
76