OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

VECTOR T1 HANDLE

272021-06-S1
Vector T1 handle, zinc/steel, black, key 751, 180°, adj 1-point cam



- Zinc / Stainless steel
- For screw / rivet installation
- 5mm compression
- Cylinder and/or padlock


PRODUCT DESCRIPTION

Recessed T-handle with 4 mm compression function in zinc or stainless steel. With holes for mounting with screws or rivets. The handle can be locked with a cylinder lock and/or padlock. The handle can then neither be lifted nor turned. Rotation right, left or 180°. Five different rule options. For a higher degree of sealing, supplement with flat gasket 275020-31, which follows the outer contours of the handle.


On request, the handle can be supplied with separate, unmounted cylinder locks. Handling is simplified and makes it possible to more easily adapt different lock combinations for changing needs.
Example: Handle in zinc, black, different locking, 180° rotation and adjustable three-point rule = 275021-02-S.


Material:
Casing, housing and roller: Glass fiber reinforced polyamide (PA6), black.
Handle: Zinc, chromed, powder coated, black structure or stainless steel (304).
Fixed rule: Steel, FZB
Adjustable rule: Zinc, passivating.
Shaft: Steel, fzb or stainless steel (304).
Padlock loop: Stainless steel (304).
Cylinder: Zinc, stainless steel (304) protective sheet.


* The fixed roller rule/three-point rule can be obtained with other dimensions on request.

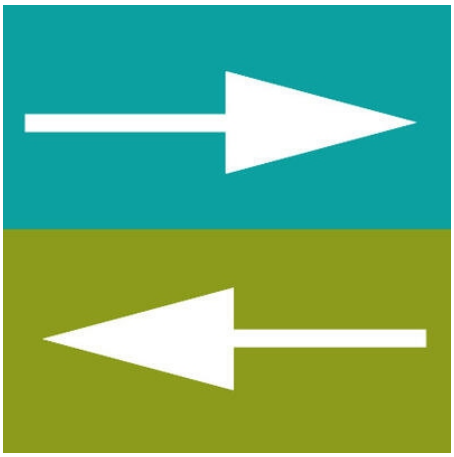




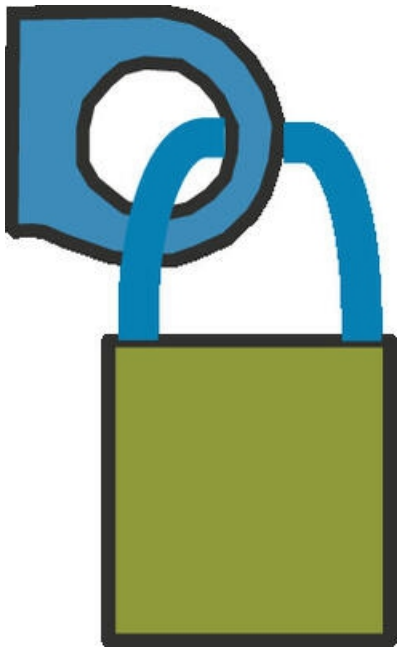


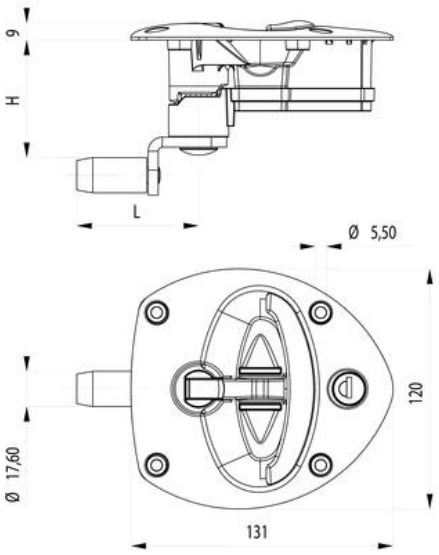

9
H
L
Ø 5,50
120
Ø 17,60
131

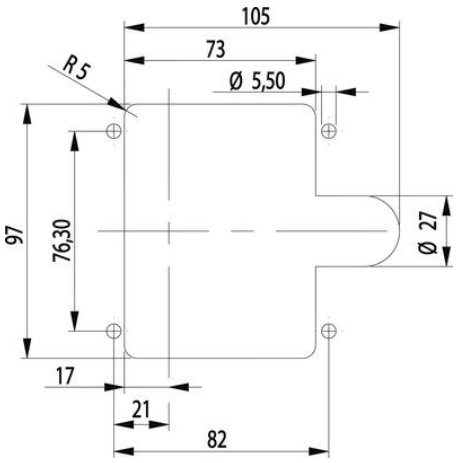

105
73
Ø 5,50
R5
97
76,30
Ø 27
17
21
82

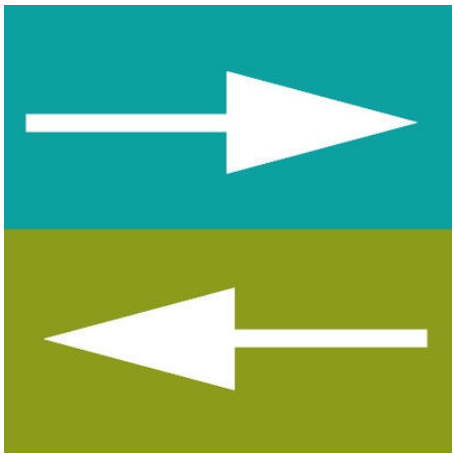


DIN EN
61373

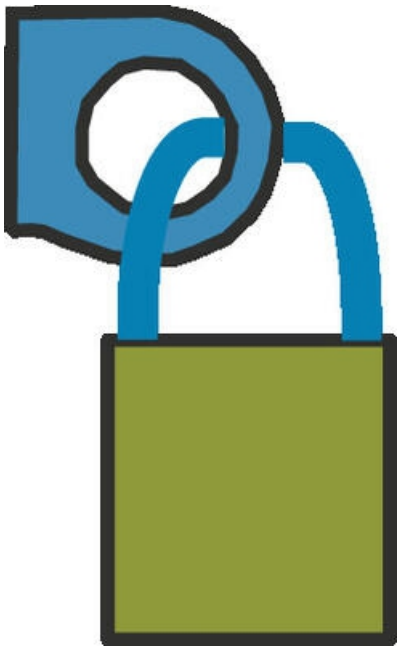

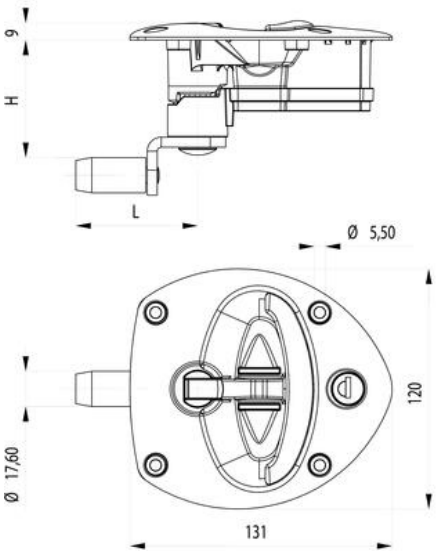
9
H
L
Ø 5,50
120
Ø 17,60
131

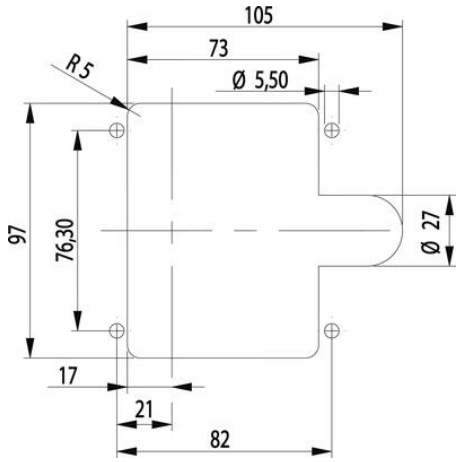
105
73
Ø 5,50
R5
97
76,30
Ø 27
17
21
82