



SUCO 0530 ELECTRONIC PRESSURE SWITCH

053010121B008
PNP output (High Side), NO, 0-10 Bar, 9/16 – 18 UNF,
Deutsch DT04-4P

- One switching output
- Stainless steel & titanium wetted parts
- Silicon-on-sapphire technology
- Factory set



PRODUCT DESCRIPTION

The Suco high performance series of electronic pressure switches offers outstanding overpressure protection (up to 4x), long service life even under high pressure change rates whilst giving very low temperature error and excellent long-term stability. Using Silicon-on-sapphire technology for high reliability, EMC compatibility and accuracy there are five standard pressure ranges starting at 0-10 bar all the way up to 0-600 bar and a hysteresis of 0.2%-99.8%. Output option of PNP or NPN and the choice of normally open or normally closed with one switching output factory set (unadjustable by the user). The wetted parts are made of stainless steel and titanium in an all welded design ensuring excellent media compatibility with seven standard electrical connection options including Deutsch, DIN and M12 combined with eight standard thread type options.

Customer specific solutions are also available on request.

Application examples

- Automotive
- Braking systems
- Medical
- Mobile hydraulics
- Off highway
- Off-shore
- Rail

TECHNICAL DATA

GENERAL DATA

Adjustment range max	10 bar
Adjustment range min	0 bar
Electrical connection	Deutsch DT04-4P
Process connection	9/16-18UNF

Function	Normally open (SPST)
Output	PNP
Burst pressure	80 bar
Pressure max	40 bar

TEMPERATURE & MATERIALS DATA


Temperature of media from	-40 °C
Temperature of media to	125 °C
Temperature ambient from	-40 °C
Temperature ambient to	100 °C
Material of body	Stainless steel 1.4305
Material of wetted parts	Stainless steel 1.4305, Titanium

ADDITIONAL DATA

Supply voltage dc max	32 V DC
Supply voltage dc min	9.6 V DC
Pressure rise	≤ 5,000 bar/s
Switching time	< 2 ms
Switching point adjustment range	2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory
Weight	80 g

SAFETY & APPROVALS

IP class	IP67, IP6K9K
Hysteresis	2..99.8% of nominal pressure range (full scale), programmable at factory
Shock resistance	500m / s ² ; 11 ms half sine wave; DIN EN 60068-2-27
Vibration resistance	20g: 4..2000 Hz sine wave, DIN EN 60068-2-6
EMC	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Long term stability	±0.1 % of adjustment range (full scale) per year
Mechanical life expectancy	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
Repeatability	±0.1 % full scale

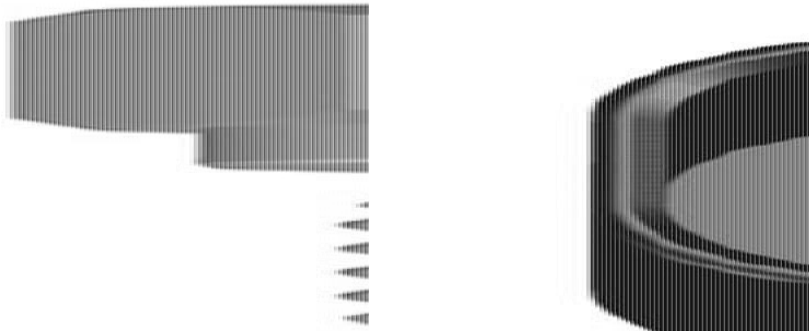

DIN EN 175301-803-A	M 12 - DIN EN 61076-2-101 A	ISO 15176-A1-4.1	AMP Superseal																																								
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pinout • 60 / 76 mm ² • Ø 10 mm Order number: 001	Pinout • 54 mm • Ø 10 mm Order number: 002	Pinout • 65 mm • Ø 10 mm Order number: 003	Pinout • 75 mm • Ø 10 mm Order number: 007																																								
*without cable (cable) = 000, with cable (cable) = 000																																											
DEUTSCH DT04-4P	DEUTSCH DT04-3P	Cable connection																																									
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	Cable	Assignment																						
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
		white	Ch+																																								
		black	Ch-																																								
		black	Ch+																																								
		black	Ch-																																								

	Pinout • 38 mm • Ø 10 mm Order number: 004	Pinout • 38 mm • Ø 10 mm Order number: 005	Pinout • 65 mm • Ø 10 mm Order number: 011	
Thread code 41	Thread code 03	Thread code 04	Thread code 09	
Thread code 00	Thread code 02	Thread code 21	Thread code 42	


Fig. 22

Connection diagrams

Fig. 23

Fig. 24

Fig. 25

Fig. 26

Fig. 27

Fig. 28

Fig. 29

Fig. 30

Fig. 31

Fig. 32

Fig. 33

Fig. 34

Fig. 35

Fig. 36

Fig. 37

Fig. 38

Fig. 39

Fig. 40

Fig. 41

Fig. 42

Fig. 43

Fig. 44

Fig. 45

Fig. 46

Fig. 47

Fig. 48

Fig. 49

Fig. 50

Fig. 51

Fig. 52

Fig. 53

Fig. 54

Fig. 55

Fig. 56

Fig. 57

Fig. 58

Fig. 59

Fig. 60

Fig. 61

Fig. 62

Fig. 63

Fig. 64

Fig. 65

Fig. 66

Fig. 67

Fig. 68

Fig. 69

Fig. 70

Fig. 71

Fig. 72

Fig. 73

Fig. 74

Fig. 75

Fig. 76

Fig. 77

Fig. 78

Fig. 79

Fig. 80

Fig. 81

Fig. 82

Fig. 83

Fig. 84

Fig. 85

Fig. 86

Fig. 87

Fig. 88

Fig. 89

Fig. 90

Fig. 91

Fig. 92

Fig. 93

Fig. 94

Fig. 95

Fig. 96

Fig. 97

Fig. 98

Fig. 99

Fig. 100

Fig. 101

Fig. 102

Fig. 103

Fig. 104

Fig. 105

Fig. 106

Fig. 107

Fig. 108

Fig. 109

Fig. 110

Fig. 111

DIN EN 175301-803-A	M 12 - DIN EN 61076-2-101 A	ISO 15176-A1-4.1	AMP Superseal																																								
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pinout • 60 / 76 mm ² • Ø 10 mm Order number: 001	Pinout • 54 mm • Ø 10 mm Order number: 002	Pinout • 65 mm • Ø 10 mm Order number: 003	Pinout • 75 mm • Ø 10 mm Order number: 007																																								
*without cable (cable) = 000, with cable (cable) = 000																																											
DEUTSCH DT04-4P	DEUTSCH DT04-3P	Cable connection																																									
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	<table><tr><th>Cable</th><th>Assignment</th></tr><tr><td>white</td><td>Ch+</td></tr><tr><td>black</td><td>Ch-</td></tr><tr><td>black</td><td>Ch+</td></tr><tr><td>black</td><td>Ch-</td></tr></table>	Cable	Assignment	white	Ch+	black	Ch-	black	Ch+	black	Ch-											
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Cable	Assignment																																										
white	Ch+																																										
black	Ch-																																										
black	Ch+																																										
black	Ch-																																										
Pinout • 38 mm • Ø 10 mm Order number: 004	Pinout • 38 mm • Ø 10 mm Order number: 005	Pinout • 65 mm • Ø 10 mm Order number: 011																																									
Thread code 41	Thread code 03	Thread code 04	Thread code 09																																								
Thread code 00	Thread code 02	Thread code 21	Thread code 42																																								



Fig. 22

Connection diagrams

Fig. 23

Fig. 24

Fig. 25

Fig. 26

Fig. 27

Fig. 28

Fig. 29

Fig. 30

Fig. 31

Fig. 32

Fig. 33

Fig. 34

Fig. 35

Fig. 36

Fig. 37

Fig. 38

Fig. 39

Fig. 40

Fig. 41

Fig. 42

Fig. 43

Fig. 44

Fig. 45

Fig. 46

Fig. 47

Fig. 48

Fig. 49

Fig. 50

Fig. 51

Fig. 52

Fig. 53

Fig. 54

Fig. 55

Fig. 56

Fig. 57

Fig. 58

Fig. 59

Fig. 60

Fig. 61

Fig. 62

Fig. 63

Fig. 64

Fig. 65

Fig. 66

Fig. 67

Fig. 68

Fig. 69

Fig. 70

Fig. 71

Fig. 72

Fig. 73

Fig. 74

Fig. 75

Fig. 76

Fig. 77

Fig. 78

Fig. 79

Fig. 80

Fig. 81

Fig. 82

Fig. 83

Fig. 84

Fig. 85

Fig. 86

Fig. 87

Fig. 88

Fig. 89

Fig. 90

Fig. 91

Fig. 92

Fig. 93

Fig. 94

Fig. 95

Fig. 96

Fig. 97

Fig. 98

Fig. 99

Fig. 100

Fig. 101

Fig. 102

Fig. 103

Fig. 104

Fig. 105

Fig. 106

Fig. 107

Fig. 108

Fig. 109

Fig. 110

Fig. 111