



SUCO 0530 ELECTRONIC PRESSURE SWITCH

053025120B004

PNP output (High Side), NO, 0-25 Bar, 7/16 – 20 UNF,
Bayonet ISO 15170-A1-4.1

- One switching output
- Stainless steel & titanium wetted parts
- Silicon-on-sapphire technology
- Factory set



PRODUCT DESCRIPTION

The Suco high performance series of electronic pressure switches offers outstanding overpressure protection (up to 4x), long service life even under high pressure change rates whilst giving very low temperature error and excellent long-term stability. Using Silicon-on-sapphire technology for high reliability, EMC compatibility and accuracy there are five standard pressure ranges starting at 0-10 bar all the way up to 0-600 bar and a hysteresis of 0.2%-99.8%. Output option of PNP or NPN and the choice of normally open or normally closed with one switching output factory set (unadjustable by the user). The wetted parts are made of stainless steel and titanium in an all welded design ensuring excellent media compatibility with seven standard electrical connection options including Deutsch, DIN and M12 combined with eight standard thread type options.

Customer specific solutions are also available on request.

Application examples

- Automotive
- Braking systems
- Medical
- Mobile hydraulics
- Off highway
- Off-shore
- Rail

TECHNICAL DATA

GENERAL DATA

Adjustment range max	25 bar
Adjustment range min	0 bar
Function	Normally open (SPST)
Output	PNP
Burst pressure	200 bar

Pressure max	100 bar
--------------	---------

TEMPERATURE & MATERIALS DATA

Temperature of media from	-40 °C
Temperature of media to	125 °C
Temperature ambient from	-40 °C
Temperature ambient to	100 °C
Material of body	Stainless steel 1.4305
Material of wetted parts	Stainless steel 1.4305, Titanium

ADDITIONAL DATA

Supply voltage dc max	32 V DC
Supply voltage dc min	9.6 V DC
Pressure rise	≤ 5,000 bar/s
Switching time	< 2 ms
Switching point adjustment range	2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory
Weight	80 g

SAFETY & APPROVALS

IP class	IP67, IP6K9K
Hysteresis	2..99.8% of nominal pressure range (full scale), programmable at factory
Shock resistance	500m / s ² ; 11 ms half sine wave; DIN EN 60068-2-27
Vibration resistance	20g: 4..2000 Hz sine wave, DIN EN 60068-2-6
EMC	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Long term stability	±0.1 % of adjustment range (full scale) per year
Mechanical life expectancy	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
Repeatability	±0.1 % full scale


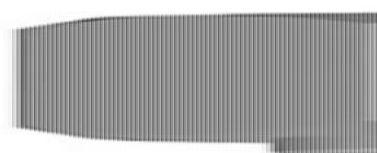




Fig. 221


Connection diagrams

Up to 100 V AC



For permanent operating on each connector 160 V AC for 10 s

Up to 100 V AC



For permanent operating on each connector 160 V AC for 10 s

Technical modifications and errors excepted.


DIN EN 175301-803-A	M 12 - DIN EN 61076-2-101 A	ISO 15176-A1-4.1	AMP Superseal																																								
																																											
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>On</td></tr><tr><td>2</td><td>Off</td></tr><tr><td>3</td><td>On</td></tr><tr><td>4</td><td>Off</td></tr></table> <p>IP67</p> <p>• 60 / 70 mm²</p> <p>• 12.50 mm</p> <p>Order number: 001</p>	Pin	Assignment	1	On	2	Off	3	On	4	Off	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Line</td></tr><tr><td>2</td><td>NC</td></tr><tr><td>3</td><td>GNd</td></tr><tr><td>4</td><td>Off</td></tr></table> <p>IP67</p> <p>• 54 mm</p> <p>• 12.50 mm</p> <p>Order number: 002</p>	Pin	Assignment	1	Line	2	NC	3	GNd	4	Off	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Line</td></tr><tr><td>2</td><td>NC</td></tr><tr><td>3</td><td>GNd</td></tr><tr><td>4</td><td>Off</td></tr></table> <p>IP67</p> <p>• 65 mm (max)</p> <p>• 12.50 mm</p> <p>Order number: 004</p>	Pin	Assignment	1	Line	2	NC	3	GNd	4	Off	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Line</td></tr><tr><td>2</td><td>Off</td></tr><tr><td>3</td><td>Line</td></tr><tr><td>4</td><td>Off</td></tr></table> <p>IP67</p> <p>• 73 mm</p> <p>• 12.50 mm</p> <p>Order number: 003</p>	Pin	Assignment	1	Line	2	Off	3	Line	4	Off
Pin	Assignment																																										
1	On																																										
2	Off																																										
3	On																																										
4	Off																																										
Pin	Assignment																																										
1	Line																																										
2	NC																																										
3	GNd																																										
4	Off																																										
Pin	Assignment																																										
1	Line																																										
2	NC																																										
3	GNd																																										
4	Off																																										
Pin	Assignment																																										
1	Line																																										
2	Off																																										
3	Line																																										
4	Off																																										
DEUTSCH DT04-4P																																											
																																											
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>GNd</td></tr><tr><td>2</td><td>On</td></tr><tr><td>3</td><td>NC</td></tr><tr><td>4</td><td>Off</td></tr></table> <p>IP67</p> <p>• 38 mm</p> <p>• 12.50 mm</p> <p>Order number: 004</p>	Pin	Assignment	1	GNd	2	On	3	NC	4	Off	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Line</td></tr><tr><td>2</td><td>GNd</td></tr><tr><td>3</td><td>Off</td></tr></table> <p>IP67</p> <p>• 38 mm</p> <p>• 12.50 mm</p> <p>Order number: 005</p>	Pin	Assignment	1	Line	2	GNd	3	Off	<table><tr><th>Cable</th><th>Assignment</th></tr><tr><td>red</td><td>Line</td></tr><tr><td>white</td><td>Off</td></tr><tr><td>black</td><td>GNd</td></tr></table> <p>IP67</p> <p>• 64 mm (20 mm band width)</p> <p>• 12.50 mm</p> <p>Order number: 011</p>	Cable	Assignment	red	Line	white	Off	black	GNd															
Pin	Assignment																																										
1	GNd																																										
2	On																																										
3	NC																																										
4	Off																																										
Pin	Assignment																																										
1	Line																																										
2	GNd																																										
3	Off																																										
Cable	Assignment																																										
red	Line																																										
white	Off																																										
black	GNd																																										
																																											
Thread code: 41	Thread code: 03	Thread code: 04	Thread code: 09																																								
																																											
Thread code: 00	Thread code: 02	Thread code: 01	Thread code: 02																																								



Fig. 221


Connection diagrams

Up to 100 V AC



For permanent operating on each connector 160 V AC for 10 s

Up to 100 V AC



For permanent operating on each connector 160 V AC for 10 s

Technical modifications and errors excepted.

DIN EN 175301-803-A	M 12 - DIN EN 61076-2-101 A	ISO 15176-A1-4.1	AMP Superseal																																								
																																											
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>On</td></tr><tr><td>2</td><td>Off</td></tr><tr><td>3</td><td>On</td></tr><tr><td>4</td><td>Off</td></tr></table> <p>IP67</p> <p>• 60 / 70 mm²</p> <p>• 12.50 mm</p> <p>Order number: 001</p>	Pin	Assignment	1	On	2	Off	3	On	4	Off	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Line</td></tr><tr><td>2</td><td>NC</td></tr><tr><td>3</td><td>GNd</td></tr><tr><td>4</td><td>Off</td></tr></table> <p>IP67</p> <p>• 54 mm</p> <p>• 12.50 mm</p> <p>Order number: 002</p>	Pin	Assignment	1	Line	2	NC	3	GNd	4	Off	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Line</td></tr><tr><td>2</td><td>NC</td></tr><tr><td>3</td><td>GNd</td></tr><tr><td>4</td><td>Off</td></tr></table> <p>IP67</p> <p>• 65 mm (max)</p> <p>• 12.50 mm</p> <p>Order number: 004</p>	Pin	Assignment	1	Line	2	NC	3	GNd	4	Off	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Line</td></tr><tr><td>2</td><td>Off</td></tr><tr><td>3</td><td>Line</td></tr><tr><td>4</td><td>Off</td></tr></table> <p>IP67</p> <p>• 73 mm</p> <p>• 12.50 mm</p> <p>Order number: 003</p>	Pin	Assignment	1	Line	2	Off	3	Line	4	Off
Pin	Assignment																																										
1	On																																										
2	Off																																										
3	On																																										
4	Off																																										
Pin	Assignment																																										
1	Line																																										
2	NC																																										
3	GNd																																										
4	Off																																										
Pin	Assignment																																										
1	Line																																										
2	NC																																										
3	GNd																																										
4	Off																																										
Pin	Assignment																																										
1	Line																																										
2	Off																																										
3	Line																																										
4	Off																																										
* without copper cable = 010m, with copper cable = 15 mm																																											
DEUTSCH DT04-4P	DEUTSCH DT04-3P	Cable connection																																									
																																											
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>GNd</td></tr><tr><td>2</td><td>On</td></tr><tr><td>3</td><td>NC</td></tr><tr><td>4</td><td>Off</td></tr></table> <p>IP67</p> <p>• 38 mm</p> <p>• 12.50 mm</p> <p>Order number: 004</p>	Pin	Assignment	1	GNd	2	On	3	NC	4	Off	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Line</td></tr><tr><td>2</td><td>GNd</td></tr><tr><td>3</td><td>Off</td></tr></table> <p>IP67</p> <p>• 38 mm</p> <p>• 12.50 mm</p> <p>Order number: 005</p>	Pin	Assignment	1	Line	2	GNd	3	Off	<table><tr><th>Cable</th><th>Assignment</th></tr><tr><td>red</td><td>Line</td></tr><tr><td>white</td><td>Off</td></tr><tr><td>black</td><td>GNd</td></tr></table> <p>IP67</p> <p>• 64 mm (20 mm band width)</p> <p>• 12.50 mm</p> <p>Order number: 011</p>	Cable	Assignment	red	Line	white	Off	black	GNd															
Pin	Assignment																																										
1	GNd																																										
2	On																																										
3	NC																																										
4	Off																																										
Pin	Assignment																																										
1	Line																																										
2	GNd																																										
3	Off																																										
Cable	Assignment																																										
red	Line																																										
white	Off																																										
black	GNd																																										
																																											
Thread code 41	Thread code 03	Thread code 04	Thread code 09																																								
																																											
Thread code 00	Thread code 02	Thread code 01	Thread code 02																																								