



## SUCO 0530 ELECTRONIC PRESSURE SWITCH

053025142B010

PNP output (High Side), NO, 0-25 Bar, M14x1.5 – DIN  
EN ISO 9974-2, Deutsch DT04-3P

- One switching output
- Stainless steel & titanium wetted parts
- Silicon-on-sapphire technology
- Factory set



### PRODUCT DESCRIPTION

The Suco high performance series of electronic pressure switches offers outstanding overpressure protection (up to 4x), long service life even under high pressure change rates whilst giving very low temperature error and excellent long-term stability. Using Silicon-on-sapphire technology for high reliability, EMC compatibility and accuracy there are five standard pressure ranges starting at 0-10 bar all the way up to 0-600 bar and a hysteresis of 0.2%-99.8%. Output option of PNP or NPN and the choice of normally open or normally closed with one switching output factory set (unadjustable by the user). The wetted parts are made of stainless steel and titanium in an all welded design ensuring excellent media compatibility with seven standard electrical connection options including Deutsch, DIN and M12 combined with eight standard thread type options.

Customer specific solutions are also available on request.

#### Application examples

- Automotive
- Braking systems
- Medical
- Mobile hydraulics
- Off highway
- Off-shore
- Rail

## TECHNICAL DATA

### GENERAL DATA

Adjustment range max	25 bar
Adjustment range min	0 bar
Electrical connection	Deutsch DT04-3P
Process connection	M14x1.5

<b>Function</b>	Normally open (SPST)
<b>Output</b>	PNP
<b>Burst pressure</b>	200 bar
<b>Pressure max</b>	100 bar

## TEMPERATURE & MATERIALS DATA


<b>Temperature of media from</b>	-40 °C
<b>Temperature of media to</b>	125 °C
<b>Temperature ambient from</b>	-40 °C
<b>Temperature ambient to</b>	100 °C
<b>Material of body</b>	Stainless steel 1.4305
<b>Material of wetted parts</b>	Stainless steel 1.4305, Titanium

## ADDITIONAL DATA

<b>Supply voltage dc max</b>	32 V DC
<b>Supply voltage dc min</b>	9.6 V DC
<b>Pressure rise</b>	≤ 5,000 bar/s
<b>Switching time</b>	< 2 ms
<b>Switching point adjustment range</b>	2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory
<b>Weight</b>	80 g

## SAFETY & APPROVALS

<b>IP class</b>	IP67, IP6K9K
<b>Hysteresis</b>	2..99.8% of nominal pressure range (full scale), programmable at factory
<b>Shock resistance</b>	500m / s <sup>2</sup> ; 11 ms half sine wave; DIN EN 60068-2-27
<b>Vibration resistance</b>	20g: 4..2000 Hz sine wave, DIN EN 60068-2-6
<b>EMC</b>	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
<b>Accuracy</b>	±0.5 % of adjustment range (Full scale) at room temperature
<b>Long term stability</b>	±0.1 % of adjustment range (full scale) per year
<b>Mechanical life expectancy</b>	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
<b>Repeatability</b>	±0.1 % full scale

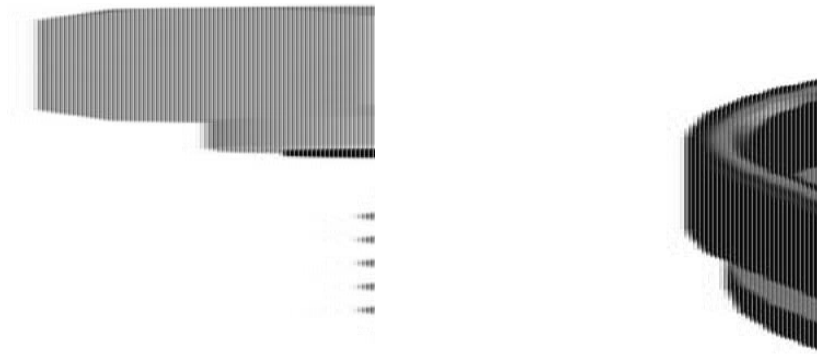

DIN EN 175301-803-A	M 12 - DIN EN 61076-2-101-A	ISO 15176-A1-4-1	AMP Superseal																																								
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Ch+</td></tr></table> <p>IP67 • 60 / 76 mm* • 10 mm Order number: 001</p>	Pin	Assignment	1	Ch+	2	Ch-	3	Gnd	4	Ch+	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Ch+</td></tr></table> <p>IP67 • 54 mm • 10 mm Order number: 002</p>	Pin	Assignment	1	Ch+	2	Ch-	3	Gnd	4	Ch+	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Ch+</td></tr></table> <p>IP67 • 65 mm • 10 mm Order number: 004</p>	Pin	Assignment	1	Ch+	2	Ch-	3	Gnd	4	Ch+	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Ch+</td></tr></table> <p>IP67 • 73 mm • 10 mm Order number: 007</p>	Pin	Assignment	1	Ch+	2	Ch-	3	Gnd	4	Ch+
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Gnd																																										
4	Ch+																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Gnd																																										
4	Ch+																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Gnd																																										
4	Ch+																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Gnd																																										
4	Ch+																																										
*without cable (code = 000), with cable (code = 10 mm)																																											
DEUTSCH DT04-4P																																											
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Ch+</td></tr></table> <p>IP67 • 38 mm • 10 mm Order number: 008</p>	Pin	Assignment	1	Ch+	2	Ch-	3	Gnd	4	Ch+	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Ch+</td></tr></table> <p>IP67 • 38 mm • 10 mm Order number: 010</p>	Pin	Assignment	1	Ch+	2	Ch-	3	Gnd	4	Ch+	<table><tr><th>Cable</th><th>Assignment</th></tr><tr><td>Red</td><td>Ch+</td></tr><tr><td>White</td><td>Ch-</td></tr><tr><td>Black</td><td>Gnd</td></tr></table> <p>IP67 • 64 mm (20 mm band width) cable length = 2 m • 10 mm Order number: 011</p>		Cable	Assignment	Red	Ch+	White	Ch-	Black	Gnd												
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Gnd																																										
4	Ch+																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Gnd																																										
4	Ch+																																										
Cable	Assignment																																										
Red	Ch+																																										
White	Ch-																																										
Black	Gnd																																										
Thread code: 41	Thread code: 03	Thread code: 04	Thread code: 09																																								
Thread code: 00	Thread code: 02	Thread code: 21	Thread code: 42																																								



Fig. 22

Connection diagrams

Up to 100 VDC



Pin assignment according to each connector

100 VDC



Pin assignment according to each connector

100 VDC

Technical modifications and errors excepted.

EN 175301-803-A	M 12 - EN 61076-2-101-A	ISO 15176-A1-4-1	AMP Superseal																																								
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Ch+</td></tr></table> <p>IP67 • <math>\Phi = 60 / 76 \text{ mm}^*</math> • <math>\Phi = 10 \text{ mm}</math> Order number: 001</p> <p><small>*without copper socket = 0 mm, with copper socket = 10 mm</small></p>	Pin	Assignment	1	Ch+	2	Ch-	3	Gnd	4	Ch+	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Ch+</td></tr></table> <p>IP67 • <math>\Phi = 54 \text{ mm}</math> • <math>\Phi = 10 \text{ mm}</math> Order number: 002</p>	Pin	Assignment	1	Ch+	2	Ch-	3	Gnd	4	Ch+	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Ch+</td></tr></table> <p>IP67 • <math>\Phi = 65 \text{ mm}</math> • <math>\Phi = 10 \text{ mm}</math> Order number: 004</p>	Pin	Assignment	1	Ch+	2	Ch-	3	Gnd	4	Ch+	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Ch+</td></tr></table> <p>IP67 • <math>\Phi = 73 \text{ mm}</math> • <math>\Phi = 10 \text{ mm}</math> Order number: 007</p>	Pin	Assignment	1	Ch+	2	Ch-	3	Gnd	4	Ch+
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Gnd																																										
4	Ch+																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Gnd																																										
4	Ch+																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Gnd																																										
4	Ch+																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Gnd																																										
4	Ch+																																										
Cable connection																																											
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Ch+</td></tr></table> <p>IP67 • <math>\Phi = 38 \text{ mm}</math> • <math>\Phi = 10 \text{ mm}</math> Order number: 008</p>	Pin	Assignment	1	Ch+	2	Ch-	3	Gnd	4	Ch+	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Ch+</td></tr></table> <p>IP67 • <math>\Phi = 38 \text{ mm}</math> • <math>\Phi = 10 \text{ mm}</math> Order number: 010</p>	Pin	Assignment	1	Ch+	2	Ch-	3	Gnd	4	Ch+	<table><tr><th>Cable</th><th>Assignment</th></tr><tr><td>Red</td><td>Ch+</td></tr><tr><td>White</td><td>Ch-</td></tr><tr><td>Black</td><td>Gnd</td></tr></table> <p>IP67 • <math>\Phi = 64 \text{ mm}</math> (20 mm band width) Cable length: 2 m • <math>\Phi = 10 \text{ mm}</math> Order number: 011</p>	Cable	Assignment	Red	Ch+	White	Ch-	Black	Gnd													
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Gnd																																										
4	Ch+																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Gnd																																										
4	Ch+																																										
Cable	Assignment																																										
Red	Ch+																																										
White	Ch-																																										
Black	Gnd																																										
Thread code: 41	Thread code: 03	Thread code: 04	Thread code: 09																																								
Thread code: 00	Thread code: 02	Thread code: 21	Thread code: 42																																								



Fig. 22

Connection diagrams

Up to 100 VDC



Pin assignment according to each connector

100 VDC



Pin assignment according to each connector

100 VDC

Technical modifications and errors excepted.