



SUCO 0530 ELECTRONIC PRESSURE SWITCH

053025220B008

PNP output (High Side), NO, 0-250 Bar, 7/16 – 20 UNF,
Deutsch DT04-4P

- One switching output
- Stainless steel & titanium wetted parts
- Silicon-on-sapphire technology
- Factory set



PRODUCT DESCRIPTION

The Suco high performance series of electronic pressure switches offers outstanding overpressure protection (up to 4x), long service life even under high pressure change rates whilst giving very low temperature error and excellent long-term stability. Using Silicon-on-sapphire technology for high reliability, EMC compatibility and accuracy there are five standard pressure ranges starting at 0-10 bar all the way up to 0-600 bar and a hysteresis of 0.2%-99.8%. Output option of PNP or NPN and the choice of normally open or normally closed with one switching output factory set (unadjustable by the user). The wetted parts are made of stainless steel and titanium in an all welded design ensuring excellent media compatibility with seven standard electrical connection options including Deutsch, DIN and M12 combined with eight standard thread type options.

Customer specific solutions are also available on request.

Application examples

- Automotive
- Braking systems
- Medical
- Mobile hydraulics
- Off highway
- Off-shore
- Rail

TECHNICAL DATA

GENERAL DATA

Adjustment range max	250 bar
Adjustment range min	0 bar
Electrical connection	Deutsch DT04-4P
Function	Normally open (SPST)

Output	PNP
Burst pressure	2000 bar
Pressure max	1000 bar

TEMPERATURE & MATERIALS DATA



Temperature of media from	-40 °C
Temperature of media to	125 °C
Temperature ambient from	-40 °C
Temperature ambient to	100 °C
Material of body	Stainless steel 1.4305
Material of wetted parts	Stainless steel 1.4305, Titanium

ADDITIONAL DATA

Supply voltage dc max	32 V DC
Supply voltage dc min	9.6 V DC
Pressure rise	≤ 5,000 bar/s
Switching time	< 2 ms
Switching point adjustment range	2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory
Weight	80 g

SAFETY & APPROVALS

IP class	IP67, IP6K9K
Hysteresis	2..99.8% of nominal pressure range (full scale), programmable at factory
Shock resistance	500m / s ² ; 11 ms half sine wave; DIN EN 60068-2-27
Vibration resistance	20g: 4..2000 Hz sine wave, DIN EN 60068-2-6
EMC	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Long term stability	±0.1 % of adjustment range (full scale) per year
Mechanical life expectancy	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
Repeatability	±0.1 % full scale

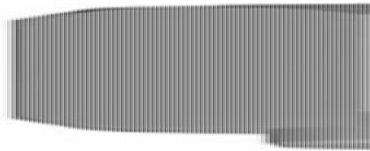

DIN EN 175301-803-A	M 12 - DIN EN 61076-2-101 A	ISO 15176-A1-4.1	AMP Superseal
Pin Assignment 1 Ch+ 2 Ch- 3 Gnd 4 Ch+	Pin Assignment 1 Ch+ 2 Ch- 3 Gnd 4 Ch+	Pin Assignment 1 Ch+ 2 Ch- 3 Gnd 4 Ch+	Pin Assignment 1 Ch+ 2 Ch- 3 Gnd 4 Ch+
IP67 • 50 mm max. • 10 mm max. Order number: 001	IP67 • 54 mm max. • 10 mm max. Order number: 002	IP67, IP69K • 45 mm max. • 10 mm max. Order number: 004	IP67 • 73 mm max. • 10 mm max. Order number: 007
* without cable width = 50 mm, with cable width = 50 mm			
DEUTSCH DT04-4P			
Pin Assignment 1 Ch+ 2 Ch- 3 Gnd 4 Ch+	Pin Assignment 1 Ch+ 2 Ch- 3 Gnd 4 Ch+	Cable Assignment 1 Ch+ 2 Ch- 3 Gnd 4 Ch+	
IP67, IP69K • 54 mm max. • 10 mm max. Order number: 004	IP67, IP69K • 54 mm max. • 10 mm max. Order number: 010	IP67 • 44 mm max. • 20 mm max. (cable length = 2 m) • 10 mm max. Order number: 011	
Thread code 41	Thread code 42	Thread code 43	Thread code 44
Thread code 45	Thread code 46	Thread code 47	Thread code 48



See 221

Connection diagrams

Up to 100 VDC



Pin assignment depending on each connector

100 VDC



Pin assignment depending on each connector

100 VDC



Pin assignment depending on each connector

100 VDC

Technical modifications and errors excepted.

DIN EN 175301-803-A	M 12 - DIN EN 61076-2-101 A	ISO 15176-A1-4.1	AMP Superseal																																								
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Ch+</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Gnd	4	Ch+	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Ch+</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Gnd	4	Ch+	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Ch+</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Gnd	4	Ch+	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Ch+</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Gnd	4	Ch+
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Gnd																																										
4	Ch+																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Gnd																																										
4	Ch+																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Gnd																																										
4	Ch+																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Gnd																																										
4	Ch+																																										
Pin 1 Pin 2 Pin 3 Pin 4 Pin 5	Pin 1 Pin 2 Pin 3 Pin 4 Pin 5	Pin 1 Pin 2 Pin 3 Pin 4 Pin 5	Pin 1 Pin 2 Pin 3 Pin 4 Pin 5																																								
ISO3 Ø = 40 / 50 mm Ø = 12 mm Order number: 001	ISO7 Ø = 50 mm Ø = 12 mm Order number: 002	ISO3 ISO306 Ø = 45 mm Ø = 22 mm Order number: 003	ISO7 Ø = 71 mm Ø = 28 mm Order number: 004																																								
* without cable width = 50 mm, with cable width = 70 mm																																											
DEUTSCH DT04-4P	DEUTSCH DT04-3P	Cable connection																																									
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	<table><tr><th>Cable</th><th>Assignment</th></tr><tr><td>red</td><td>Ch+</td></tr><tr><td>white</td><td>Ch-</td></tr><tr><td>black</td><td>Block</td></tr></table>		Cable	Assignment	red	Ch+	white	Ch-	black	Block														
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
Cable	Assignment																																										
red	Ch+																																										
white	Ch-																																										
black	Block																																										
Pin 1 Pin 2 Pin 3 Pin 4	Pin 1 Pin 2 Pin 3	Pin 1 Pin 2 Pin 3 Pin 4 Pin 5 Pin 6 Pin 7 Pin 8 Pin 9 Pin 10 Pin 11 Pin 12 Pin 13 Pin 14 Pin 15 Pin 16 Pin 17 Pin 18 Pin 19 Pin 20 Pin 21 Pin 22 Pin 23 Pin 24 Pin 25 Pin 26 Pin 27 Pin 28 Pin 29 Pin 30 Pin 31 Pin 32 Pin 33 Pin 34 Pin 35 Pin 36 Pin 37 Pin 38 Pin 39 Pin 40 Pin 41 Pin 42 Pin 43 Pin 44 Pin 45 Pin 46 Pin 47 Pin 48 Pin 49 Pin 50 Pin 51 Pin 52 Pin 53 Pin 54 Pin 55 Pin 56 Pin 57 Pin 58 Pin 59 Pin 60 Pin 61 Pin 62 Pin 63 Pin 64 Pin 65 Pin 66 Pin 67 Pin 68 Pin 69 Pin 70 Pin 71 Pin 72 Pin 73 Pin 74 Pin 75 Pin 76 Pin 77 Pin 78 Pin 79 Pin 80 Pin 81 Pin 82 Pin 83 Pin 84 Pin 85 Pin 86 Pin 87 Pin 88 Pin 89 Pin 90 Pin 91 Pin 92 Pin 93 Pin 94 Pin 95 Pin 96 Pin 97 Pin 98 Pin 99 Pin 100																																									
ISO3 ISO306 Ø = 40 mm Ø = 22 mm Order number: 004	ISO3 ISO306 Ø = 40 mm Ø = 22 mm Order number: 005	ISO7 Ø = 64 mm Ø = 22 mm Cable length = 2 m Order number: 011																																									
Thread code 41	Thread code 42	Thread code 43	Thread code 44																																								
Thread code 45	Thread code 46	Thread code 47	Thread code 48																																								



See 221

Connection diagrams

Up to 100 VDC



Pin assignment depending on each connector

100 VDC



Pin assignment depending on each connector

100 VDC



Pin assignment depending on each connector

100 VDC

Technical modifications and errors excepted.