



SUCO 0530 ELECTRONIC PRESSURE SWITCH

053060209B007
PNP output (High Side), NO, 0-600 Bar, NPT 1/4, AMP
Superseal 1.5

- One switching output
- Stainless steel & titanium wetted parts
- Silicon-on-sapphire technology
- Factory set



PRODUCT DESCRIPTION

The SUCO 0530 is a high-performance electronic pressure switch featuring a rugged hex 22 stainless steel housing and titanium-wetted parts, designed for demanding environments. It uses a precision Silicon-on-Sapphire (SOS) sensing element for exceptional accuracy, low temperature drift, and long-term stability. This model provides a single PNP output with a “normally open” function, factory-set switching point and hysteresis, and high over-pressure protection to ensure safety under unexpected pressure spikes. It supports multiple pressure ranges up to 1,650 bar, thread options including G $\frac{1}{4}$, NPT, UNF, M10/M14, and electrical connector choices like Deutsch DT04, AMP Superseal, M12, bayonet, or pre-fitted cable, all rated to IP67/IP6K9K for water and dust resistance.

Built for rugged industrial and mobile-hydraulic use, the 0530 excels in situations requiring reliable pressure monitoring under harsh conditions. Typical applications include hydraulic systems in construction machinery, mobile equipment, pneumatic systems, and even high-pressure applications in test benches or process lines. The SOS sensor ensures rapid detection and long-term measurement consistency, while the all-welded stainless steel/titanium design resists corrosion and eliminates elastomer seals, ideal for harsh media and high change-rate pressures. With robust connector choices and factory-set parameters, it offers plug-and-play integration, minimal setup, and reliable performance, making it a trusted choice for sectors like heavy machinery, off-road vehicles, marine hydraulics, and industrial automation.

TECHNICAL DATA

GENERAL DATA

Adjustment range max	600 bar
Adjustment range min	0 bar
Electrical connection	AMP Superseal
Process connection	1/4 NPT
Function	Normally open
Output	PNP
Burst pressure	2000 bar
Pressure max	1650 bar

TEMPERATURE & MATERIALS DATA

Temperature of media from	-40 °C
Temperature of media to	125 °C
Temperature ambient from	-40 °C
Temperature ambient to	100 °C
Material of body	Stainless steel 1.4305
Material of wetted parts	Stainless steel 1.4305, Titanium

ADDITIONAL DATA

Supply voltage dc max	32 V DC
Supply voltage dc min	9.6 V DC
Pressure rise	≤ 5,000 bar/s
Switching time	< 2 ms
Switching point adjustment range	2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory
Weight	80 g

SAFETY & APPROVALS

IP class	IP67
Hysteresis	2..99.8% of nominal pressure range (full scale), programmable at factory
Shock resistance	500m / s²; 11 ms half sine wave; DIN EN 60068-2-27
Vibration resistance	20g: 4..2000 Hz sine wave, DIN EN 60068-2-6
EMC	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Long term stability	±0.1 % of adjustment range (full scale) per year
Mechanical life expectancy	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
Repeatability	±0.1 % full scale

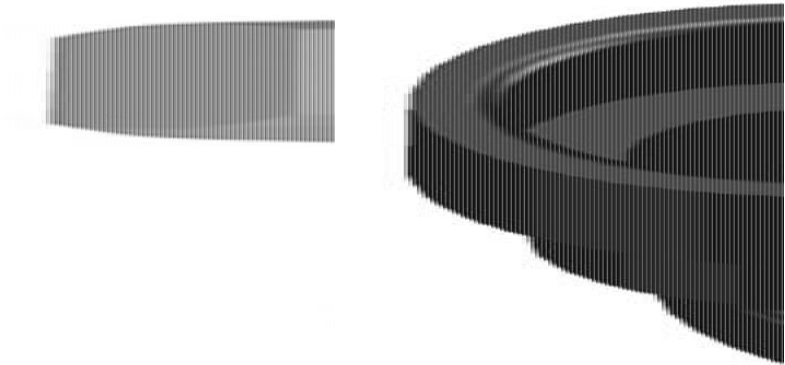






Fig. 22

Connection diagrams



Pin assignment depending on each connector 1/2 inch for 1/2 inch



Pin assignment depending on each connector 1/2 inch for 1/2 inch


Technical modifications and errors excepted.

DIN EN 175301-803-A	M 12 - DIN EN 61076-2-101 A	ISO 15176-A1-4-1	AMP Superseal																																								
																																											
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table> Pin 1 • 60 / 76 mm² • 12 / 10 mm Order number: 001	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table> Pin 1 • 54 mm • 12 / 10 mm Order number: 002	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table> Pin 1 • 65 mm (max) • 12 / 10 mm Order number: 004	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table> Pin 1 • 73 mm • 12 / 10 mm Order number: 007	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
DEUTSCH DT04-4P																																											
																																											
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table> Pin 1 • 38 mm • 12 / 10 mm Order number: 004	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr></table> Pin 1 • 38 mm • 12 / 10 mm Order number: 005	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	<table><tr><th>Cable</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table> Pin 1 • 65 mm (max) • 12 / 10 mm Order number: 011		Cable	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-												
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
Cable	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
																																											
Thread code: 01	Thread code: 02	Thread code: 04	Thread code: 09																																								
																																											
Thread code: 05	Thread code: 06	Thread code: 07	Thread code: 08																																								



Fig. 22

Connection diagrams



Pin assignment depending on each connector 1/2 inch for 1/2 inch



Pin assignment depending on each connector 1/2 inch for 1/2 inch

Technical modifications and errors excepted.

DIN EN 175301-803-A	M 12 - DIN EN 61076-2-101 A	ISO 15176-A1-4-1	AMP Superseal																																								
 <table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table> Pin 1 • 60 / 76 mm² • 12 / 10 mm Order number: 001	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	 <table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table> Pin 1 • 54 mm • 12 / 10 mm Order number: 002	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	 <table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table> Pin 1 • 65 mm (max) • 12 / 10 mm Order number: 004	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	 <table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table> Pin 1 • 73 mm • 12 / 10 mm Order number: 007	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
* without copper cable = 0104, with copper cable = 15 mm																																											
DEUTSCH DT04-4P	DEUTSCH DT04-3P	Cable connection																																									
 <table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table> Pin 1 • 38 mm • 12 / 10 mm Order number: 004	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-	 <table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr></table> Pin 1 • 38 mm • 12 / 10 mm Order number: 005	Pin	Assignment	1	Ch+	2	Ch-	3	Ch+	 <table><tr><th>Cable</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch+</td></tr><tr><td>4</td><td>Ch-</td></tr></table> Pin 1 • 65 mm (max) • 12 / 10 mm (cable add) Cable length: 1 m • 12 / 22 mm Order number: 011	Cable	Assignment	1	Ch+	2	Ch-	3	Ch+	4	Ch-													
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
Cable	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch+																																										
4	Ch-																																										
 Thread code 01	 Thread code 02	 Thread code 04	 Thread code 09																																								
 Thread code 05	 Thread code 06	 Thread code 07	 Thread code 08																																								