



SUCO 0531 ELECTRONIC PRESSURE SWITCH

053110109B007

PNP output (High Side), NC, 0-10 Bar, NPT 1/4, AMP Superseal 1.5

- One Switching Output
- Stainless Steel & Titanium Wetted Parts
- Silicon-On-Sapphire Technology
- Factory Set



PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Adjustment range max	10 bar
Adjustment range min	0 bar
Electrical connection	AMP Superseal
Process connection	1/4 NPT
Function	Normally Closed (SPST)
Output	PNP
Burst pressure	80 bar
Pressure max	40 bar

TEMPERATURE & MATERIALS DATA



Temperature of media from	-40 °C
Temperature of media to	125 °C
Temperature ambient from	-40 °C
Temperature ambient to	100 °C
Material of body	Stainless steel 1.4305
Material of wetted parts	Stainless steel 1.4305, Titanium

ADDITIONAL DATA

Supply voltage dc max	32 V DC
Supply voltage dc min	9.6 V DC
Pressure rise	≤ 5,000 bar/s
Switching time	< 2 ms
Switching point adjustment range	2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory
Weight	80 g

SAFETY & APPROVALS

IP class	IP67
Hysteresis	2..99.8% of nominal pressure range (full scale), programmable at factory
Shock resistance	500m / s²; 11 ms half sine wave; DIN EN 60068-2-27
Vibration resistance	20g; 4..2000 Hz sine wave, DIN EN 60068-2-6
EMC	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Long term stability	±0.1 % of adjustment range (full scale) per year
Mechanical life expectancy	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
Repeatability	±0.1 % full scale

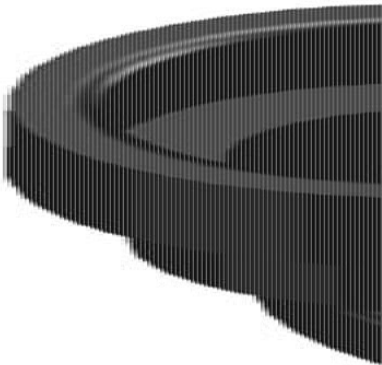

Item 221

Connection diagrams



High Side Load (HSL)



Low Side Load (LSL)

Technical modifications and errors excepted.

Pin	Assignment
1	Line
2	Out
3	Out
4	Out
5	Out

IP67
 L = 60/75 mm
 Ø = Ø 30 mm
 Order number: 001
* without cable (cable) = 000, with cable (cable) = 000

Pin	Assignment
1	Line
2	NC
3	NC
4	Out

IP67
 L = 54 mm
 Ø = Ø 22 mm
 Order number: 002
* without cable (cable) = 000, with cable (cable) = 000

Pin	Assignment
1	Line
2	NC
3	NC
4	Out

IP67
 L = 54 mm
 Ø = Ø 22 mm
 Order number: 004
* without cable (cable) = 000, with cable (cable) = 000

Pin	Assignment
1	Out
2	Out
3	Out
4	Out

IP67
 L = 71 mm
 Ø = Ø 28 mm
 Order number: 007

Pin	Assignment
1	Line
2	Line
3	NC
4	Out

IP67
 L = 58 mm
 Ø = Ø 22 mm
 Order number: 008

Pin	Assignment
1	Line
2	Line
3	Out

IP67
 L = 58 mm
 Ø = Ø 22 mm
 Order number: 010

Cable connection

Cable	Assignment
red	Line
white	Out
black	Out

IP67
 L = 68 mm
 (ø 20 mm band adjust)
 cable length = 2 m
 Ø = Ø 22 mm
 Order number: 011

Thread code: 41

Thread code: 03

Thread code: 04

Thread code: 09

Thread code: 00

Thread code: 02

Thread code: 21

Thread code: 42

hex 22
 Connection diagrams
 No. assigned opening in each connector
 1/22 key for 000
 Low 500 kHz 500 kHz
 No. assigned opening in each connector
 1/22 key for 000
 Technical modifications and errors excepted.

Pin	Assignment
1	Line
2	Out
3	Out
4	Out
5	Out

IP67
 L = 60/75 mm
 Ø = Ø 30 mm
 Order number: 001
* without cable (cable) = 000, with cable (cable) = 000

Pin	Assignment
1	Line
2	NC
3	NC
4	Out

IP67
 L = 54 mm
 Ø = Ø 22 mm
 Order number: 002
* without cable (cable) = 000, with cable (cable) = 000

Pin	Assignment
1	Line
2	NC
3	NC
4	Out

IP67
 L = 54 mm
 Ø = Ø 22 mm
 Order number: 004
* without cable (cable) = 000, with cable (cable) = 000

Pin	Assignment
1	Out
2	Out
3	Out
4	Out

IP67
 L = 71 mm
 Ø = Ø 28 mm
 Order number: 007

Pin	Assignment
1	Line
2	Line
3	NC
4	Out

IP67
 L = 58 mm
 Ø = Ø 22 mm
 Order number: 008

Pin	Assignment
1	Line
2	Line
3	Out

IP67
 L = 58 mm
 Ø = Ø 22 mm
 Order number: 010

Cable connection

Cable	Assignment
red	Line
white	Out
black	Out

IP67
 L = 68 mm
 (ø 20 mm band adjust)
 cable length = 2 m
 Ø = Ø 22 mm
 Order number: 011

Thread code: 41

Thread code: 03

Thread code: 04

Thread code: 09

Thread code: 00

Thread code: 02

Thread code: 21

Thread code: 42