

SUCO 0531 ELECTRONIC PRESSURE SWITCH

053125204B011
PNP output (High Side), NC, 0-250 Bar, NPT 1/8, Cable connection



- One Switching Output
- Stainless Steel & Titanium Wetted Parts
- Silicon-On-Sapphire Technology
- Factory Set



PRODUCT DESCRIPTION

The SUCO 0541 is a compact, high-performance electronic pressure switch engineered with dual PNP outputs, both configured as normally closed. Encased in a durable hex-22 stainless-steel and titanium-wetted housing, it utilises Silicon-on-Sapphire (SoS) sensor technology to deliver precision and long-term stability, while offering high overpressure protection up to 4× the rated pressure. Available in pressure ranges spanning 0–10 bar to 0–600 bar, the 0541 switch supports switching currents up to 500 mA and responds rapidly under demanding conditions with pressure change rates reaching 5,000 bar/s. Factory-set switching points and hysteresis (0.2–99.8 % FS) ensure reliable performance, with a sealed welded design eliminating elastomer seals and meeting IP67 and industrial EMC standards.

The 0541 excels in harsh hydraulic and pneumatic environments, such as construction machinery, mobile hydraulic systems, off-road vehicles, and industrial automation, where compact size, durable construction, and reliable switching under dynamic pressures are essential. Its dual NC PNP outputs allow for redundant or staged switching logic in safety circuits or PLC-controlled systems, ideal for overpressure alarms, machine shutdowns, or interlock functions. The fast response time, high resistance to pressure peaks, and welded sensor design make it particularly suitable for vibration-heavy or wash-down settings. Furthermore, the availability of diverse process threads and electrical connectors ensures seamless integration into OEM systems requiring rugged, precise, and dependable pressure monitoring.

TECHNICAL DATA

GENERAL DATA

Adjustment range max	250 bar
Adjustment range min	0 bar
Electrical connection	Embedded 2m cable
Process connection	1/8 NPT
Function	Normally Closed
Output	PNP
Burst pressure	2000 bar
Pressure max	1000 bar

TEMPERATURE & MATERIALS DATA


Temperature of media from	-40 °C
Temperature of media to	125 °C
Temperature ambient from	-40 °C
Temperature ambient to	100 °C
Material of body	Stainless steel 1.4305
Material of wetted parts	Stainless steel 1.4305, Titanium

ADDITIONAL DATA

Supply voltage dc max	32 V DC
Supply voltage dc min	9.6 V DC
Pressure rise	≤ 5,000 bar/s
Switching time	< 2 ms
Switching point adjustment range	2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory
Weight	135 g

SAFETY & APPROVALS


IP class	IP67
Hysteresis	2..99.8% of nominal pressure range (full scale), programmable at factory
Shock resistance	500m / s²; 11 ms half sine wave; DIN EN 60068-2-27
Vibration resistance	20g; 4..2000 Hz sine wave, DIN EN 60068-2-6
EMC	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Long term stability	±0.1 % of adjustment range (full scale) per year
Mechanical life expectancy	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
Repeatability	±0.1 % full scale

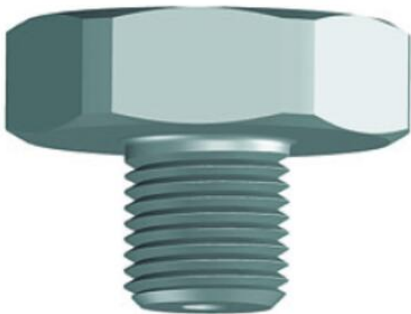




hex 22

Connection diagrams



For component depending on each connection

*H07 only for DIN



For component depending on each connection

*H07 only for DIN

Technical modifications and errors excepted.

DIN EN 175301-803-A	M 12 - DIN EN 61076-2-101 A	ISO 15175-A1-4.1	AMP Superseal
Pin Assignment 1 In 2 Out 3 Gnd 4 Out	Pin Assignment 1 In 2 In 3 Gnd 4 Out	Pin Assignment 1 In 2 In 3 Gnd 4 Out	Pin Assignment 1 In 2 In 3 Gnd 4 Out
IP67 • 60 / 75 mm ² • Ø 10 mm Order number: 001	IP67 • 54 mm • Ø 10 mm Order number: 002	IP67 • 65 mm (max) • Ø 10 mm Order number: 004	IP67 • 73 mm • Ø 10 mm Order number: 003
* without copper jacket = 15 mm, with copper jacket = 15 mm			
DEUTSCH DT04-4P	DEUTSCH DT04-3P	Cable connection	
Pin Assignment 1 Gnd 2 In 3 In 4 Out	Pin Assignment 1 In 2 In 3 Gnd	Cable Assignment 1 In 2 In 3 Gnd	
IP67 • 38 mm • Ø 21 mm Order number: 004	IP67 • 38 mm • Ø 21 mm Order number: 005	IP67 • 64 mm (cable length = 2 m) • Ø 21 mm Order number: 011	
Thread code: 01	Thread code: 03	Thread code: 04	Thread code: 09
Thread code: 02	Thread code: 05	Thread code: 06	Thread code: 07

DIN EN 175301-803-A	M 12 - DIN EN 61076-2-101 A	ISO 15175-A1-4.1	AMP Superseal
Pin Assignment 1 In 2 Out 3 Gnd 4 Out	Pin Assignment 1 In 2 In 3 Gnd 4 Out	Pin Assignment 1 In 2 In 3 Gnd 4 Out	Pin Assignment 1 In 2 In 3 Gnd 4 Out
IP67 • 60 / 75 mm ² • Ø 10 mm	IP67 • 54 mm • Ø 10 mm	IP67 (max) • 65 mm (max) • Ø 10 mm	IP67 • 73 mm • Ø 10 mm
Order number: 001	Order number: 002	Order number: 004	Order number: 003
* without copper socket = 60 mm, with copper socket = 75 mm			
DEUTSCH DT04-4P	DEUTSCH DT04-3P	Cable connection	
Pin Assignment 1 Gnd 2 In 3 In 4 Out	Pin Assignment 1 In 2 In 3 Gnd	Cable Assignment 40 In 1 In 2 In 3 Gnd	
IP67 (max) • 38 mm • Ø 21 mm	IP67 (max) • 38 mm • Ø 21 mm	IP67 • 64 mm • Ø 21 mm (cable length = 2 m) • Ø 21 mm	
Order number: 004	Order number: 005	Order number: 011	
Thread code: 01 1/4-18 UNF DIN 9138-1	Thread code: 03 3/16-24 UNF DIN 9138-1	Thread code: 04 1/2-14 UNF DIN 9138-1	Thread code: 09 1/2-14 UNF DIN 9138-1
Thread code: 02 1/4-18 UNF DIN 9138-1	Thread code: 05 3/16-24 UNF DIN 9138-1	Thread code: 06 1/2-14 UNF DIN 9138-1	Thread code: 07 1/2-14 UNF DIN 9138-1