

SUCO 0532 ELECTRONIC PRESSURE SWITCH

053210230B013
NPN output (Low Side), NO, 0-100 Bar, M10x1 zyl. DIN 3852-A, DIN EN 175301-803-A



- One Switching Output
- Stainless Steel & Titanium Wetted Parts
- Silicon-On-Sapphire Technology
- Factory Set



PRODUCT DESCRIPTION

The SUCO 0532 electronic pressure switch is a high-performance, factory-set device featuring a compact hex-22 stainless steel housing with titanium-wetted parts and welded design, eliminating elastomer seals. It utilises advanced Silicon-on-Sapphire (SoS) sensor technology, ensuring exceptional accuracy ($\pm 0.5\%$ FS) and long-term stability ($\pm 0.1\%$ FS/year), and delivers reliable overpressure protection up to $4\times$ the rated range. Available with a single NPN (low-side) normally-open transistor output capable of handling up to 0.5 A, it supports pressure ranges from 0–10 bar up to 0–600 bar. The 0532 offers a wide choice of process ports and electrical connections, and includes factory-set switching point and hysteresis, along with a fast response time of under 4 ms.

The 0532 is ideal for high-integrity industrial and mobile hydraulic applications, such as in construction equipment, off-road vehicles, and pneumatic systems, where compactness, precision, and reliability are crucial. Its robust SoS sensor and welded housing offer high resilience to vibration, transient pressures, and wash-down conditions, making it suitable for severe environmental exposure. The NPN output with normally open configuration and field-programmed hysteresis allows seamless integration into PLC and relay-controlled systems for safety interlocks, pressure monitoring, and automated shutdown scenarios. The switch's fast response and low moving-part design reduce wear and improve lifespan, making the SUCO 0532 a dependable solution in OEM systems requiring compact, rugged, and high-precision pressure switching.

TECHNICAL DATA

GENERAL DATA

Adjustment range max	100 bar
Adjustment range min	0 bar
Electrical connection	DIN EN 175301-803-A
Process connection	M10x1
Function	Normally open
Output	NPN
Burst pressure	800 bar
Pressure max	400 bar

TEMPERATURE & MATERIALS DATA


Temperature of media from	-40 °C
Temperature of media to	125 °C
Temperature ambient from	-40 °C
Temperature ambient to	100 °C
Material of body	Stainless steel 1.4305
Material of wetted parts	Stainless steel 1.4305, Titanium

ADDITIONAL DATA

Supply voltage dc max	32 V DC
Supply voltage dc min	9.6 V DC
Pressure rise	≤ 5,000 bar/s
Switching time	< 2 ms
Switching point adjustment range	2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory
Weight	110 g

SAFETY & APPROVALS

IP class	IP65
Hysteresis	2..99.8% of nominal pressure range (full scale), programmable at factory
Shock resistance	500m / s²; 11 ms half sine wave; DIN EN 60068-2-27
Vibration resistance	20g; 4..2000 Hz sine wave, DIN EN 60068-2-6
EMC	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Long term stability	±0.1 % of adjustment range (full scale) per year
Mechanical life expectancy	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
Repeatability	±0.1 % full scale

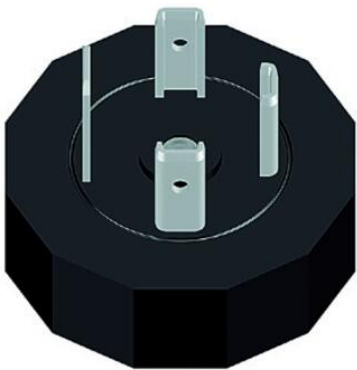

ISO 17510-100-A1-1

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

M 12 - DIN EN 45756-2 101-A

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

ISO 15110-A1-1

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

AMP Superseal

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

ISO 17510-100-A1-1

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

M 12 - DIN EN 45756-2 101-A

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

ISO 15110-A1-1

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

AMP Superseal

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

ISO 17510-100-A1-1

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

M 12 - DIN EN 45756-2 101-A

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

ISO 15110-A1-1

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

AMP Superseal

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

ISO 17510-100-A1-1

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

M 12 - DIN EN 45756-2 101-A

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

ISO 15110-A1-1

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

AMP Superseal

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

ISO 17510-100-A1-1

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

M 12 - DIN EN 45756-2 101-A

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

ISO 15110-A1-1

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

AMP Superseal

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

ISO 17510-100-A1-1

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

M 12 - DIN EN 45756-2 101-A

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

ISO 15110-A1-1

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

AMP Superseal

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

ISO 17510-100-A1-1

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

M 12 - DIN EN 45756-2 101-A

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

ISO 15110-A1-1

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

AMP Superseal

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5

ISO 17510-100-A1-1

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5


M 12 - DIN EN 45756-2 101-A

P/N	Assignment	P/N	Assignment	P/N	Assignment	P/N	Assignment
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5


ISO 15110-A1-1



Connection diagrams



*2012 only for 254s



Technical modifications and errors excepted.

EN 175301-803-A	M 12 - DIN 45326-2 161-A	ISO 15710-A1-1	AMP Superseal
Pin Assignment 1 1 2 2 3 3 4 4 5 5 6 6 7 7 8 8 9 9 10 10 11 11 12 12 13 13 14 14 15 15 16 16 17 17 18 18 19 19 20 20 21 21 22 22 23 23 24 24 25 25 26 26 27 27 28 28 29 29 30 30 31 31 32 32 33 33 34 34 35 35 36 36 37 37 38 38 39 39 40 40 41 41 42 42 43 43 44 44 45 45 46 46 47 47 48 48 49 49 50 50 51 51 52 52 53 53 54 54 55 55 56 56 57 57 58 58 59 59 60 60 61 61 62 62 63 63 64 64 65 65 66 66 67 67 68 68 69 69 70 70 71 71 72 72 73 73 74 74 75 75 76 76 77 77 78 78 79 79 80 80 81 81 82 82 83 83 84 84 85 85 86 86 87 87 88 88 89 89 90 90 91 91 92 92 93 93 94 94 95 95 96 96 97 97 98 98 99 99 100 100	Pin Assignment 1 1 2 2 3 3 4 4 5 5 6 6 7 7 8 8 9 9 10 10 11 11 12 12 13 13 14 14 15 15 16 16 17 17 18 18 19 19 20 20 21 21 22 22 23 23 24 24 25 25 26 26 27 27 28 28 29 29 30 30 31 31 32 32 33 33 34 34 35 35 36 36 37 37 38 38 39 39 40 40 41 41 42 42 43 43 44 44 45 45 46 46 47 47 48 48 49 49 50 50 51 51 52 52 53 53 54 54 55 55 56 56 57 57 58 58 59 59 60 60 61 61 62 62 63 63 64 64 65 65 66 66 67 67 68 68 69 69 70 70 71 71 72 72 73 73 74 74 75 75 76 76 77 77 78 78 79 79 80 80 81 81 82 82 83 83 84 84 85 85 86 86 87 87 88 88 89 89 90 90 91 91 92 92 93 93 94 94 95 95 96 96 97 97 98 98 99 99 100 100	Pin Assignment 1 1 2 2 3 3 4 4 5 5 6 6 7 7 8 8 9 9 10 10 11 11 12 12 13 13 14 14 15 15 16 16 17 17 18 18 19 19 20 20 21 21 22 22 23 23 24 24 25 25 26 26 27 27 28 28 29 29 30 30 31 31 32 32 33 33 34 34 35 35 36 36 37 37 38 38 39 39 40 40 41 41 42 42 43 43 44 44 45 45 46 46 47 47 48 48 49 49 50 50 51 51 52 52 53 53 54 54 55 55 56 56 57 57 58 58 59 59 60 60 61 61 62 62 63 63 64 64 65 65 66 66 67 67 68 68 69 69 70 70 71 71 72 72 73 73 74 74 75 75 76 76 77 77 78 78 79 79 80 80 81 81 82 82 83 83 84 84 85 85 86 86 87 87 88 88 89 89 90 90 91 91 92 92 93 93 94 94 95 95 96 96 97 97 98 98 99 99 100 100	Pin Assignment 1 1 2 2 3 3 4 4 5 5 6 6 7 7 8 8 9 9 10 10 11 11 12 12 13 13 14 14 15 15 16 16 17 17 18 18 19 19 20 20 21 21 22 22 23 23 24 24 25 25 26 26 27 27 28 28 29 29 30 30 31 31 32 32 33 33 34 34 35 35 36 3