



SUCO 0533 ELECTRONIC PRESSURE SWITCH

053310104B013
NPN output (Low Side), NC, 0-10 Bar, NPT 1/8, DIN EN 175301-803-A

- One Switching Output
- Stainless Steel & Titanium Wetted Parts
- Silicon-On-Sapphire Technology
- Factory Set



PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Adjustment range max	10 bar
Adjustment range min	0 bar
Electrical connection	DIN EN 175301-803-A
Process connection	1/8 NPT
Function	Normally Closed (SPST)
Output	NPN
Burst pressure	80 bar
Pressure max	40 bar

TEMPERATURE & MATERIALS DATA


Temperature of media from	-40 °C
Temperature of media to	125 °C
Temperature ambient from	-40 °C
Temperature ambient to	100 °C
Material of body	Stainless steel 1.4305
Material of wetted parts	Stainless steel 1.4305, Titanium

ADDITIONAL DATA

Supply voltage dc max	32 V DC
Supply voltage dc min	9.6 V DC
Pressure rise	≤ 5,000 bar/s
Switching time	< 2 ms
Switching point adjustment range	2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory
Weight	110 g

SAFETY & APPROVALS

IP class	IP65
Hysteresis	2..99.8% of nominal pressure range (full scale), programmable at factory
Shock resistance	500m / s²; 11 ms half sine wave; DIN EN 60068-2-27
Vibration resistance	20g; 4..2000 Hz sine wave, DIN EN 60068-2-6
EMC	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Long term stability	±0.1 % of adjustment range (full scale) per year
Mechanical life expectancy	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
Repeatability	±0.1 % full scale

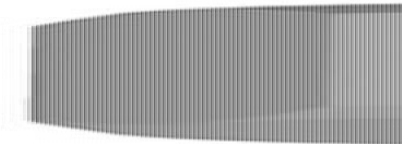

hns 221

Connection diagrams



hns 221

hns 221



hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

hns 221

Pin	Assignment
1	Line
2	Out
3	Out
4	Out
5	Out

IP67
 L = 60/75 mm
 Ø = 30 mm
 Order number: 001
* without cable (cable) = 60 mm, with cable (cable) = 75 mm

Pin	Assignment
1	Line
2	NC
3	NC
4	Out

IP67
 L = 54 mm
 Ø = 22 mm
 Order number: 002

Pin	Assignment
1	Line
2	NC
3	NC
4	Out

IP67
 L = 54 mm
 Ø = 22 mm
 Order number: 004

Pin	Assignment
1	Out
2	Out
3	Out
4	Out

IP67
 L = 71 mm
 Ø = 28 mm
 Order number: 007

Pin	Assignment
1	Line
2	Line
3	NC
4	Out

IP67
 L = 58 mm
 Ø = 22 mm
 Order number: 008

Pin	Assignment
1	Line
2	Line
3	Out

IP67
 L = 58 mm
 Ø = 22 mm
 Order number: 010

Cable connection

Cable	Assignment
red	Line
white	Out
black	Out

IP67
 L = 68 mm
 (a 20 mm band adjust)
 cable length = 2 m
 Ø = 22 mm
 Order number: 011

Thread code: 41

Thread code: 03

Thread code: 04

Thread code: 09

Thread code: 05

Thread code: 10

Thread code: 21

Thread code: 42

Electron 0530-10

hex 22

Connection diagrams

High load: 10 A, 250 V AC

Low load: 10 A, 250 V AC

Technical modifications and errors excepted.

Pin	Assignment
1	Line
2	Out
3	Out
4	Out
5	Out

IP67
 L = 60/75 mm
 Ø = 30 mm
 Order number: 001
* without cable (cable) = 60 mm, with cable (cable) = 75 mm

Pin	Assignment
1	Line
2	NC
3	NC
4	Out

IP67
 L = 54 mm
 Ø = 22 mm
 Order number: 002

Pin	Assignment
1	Line
2	NC
3	NC
4	Out

IP67
 L = 54 mm
 Ø = 22 mm
 Order number: 004

Pin	Assignment
1	Out
2	Out
3	Out
4	Out

IP67
 L = 71 mm
 Ø = 28 mm
 Order number: 007

Pin	Assignment
1	Line
2	Line
3	NC
4	Out

IP67
 L = 58 mm
 Ø = 22 mm
 Order number: 008

Pin	Assignment
1	Line
2	Line
3	Out

IP67
 L = 58 mm
 Ø = 22 mm
 Order number: 010

Cable connection

Cable	Assignment
red	Line
white	Out
black	Out

IP67
 L = 68 mm
 (a 20 mm band adjust)
 cable length = 2 m
 Ø = 22 mm
 Order number: 011

Thread code: 41

Thread code: 03

Thread code: 04

Thread code: 09

Thread code: 05

Thread code: 10

Thread code: 21

Thread code: 42