



## SUCO 0533 ELECTRONIC PRESSURE SWITCH

053310230B008  
NPN output (Low Side), NC, 0-100 Bar, M10x1 zyl. DIN  
3852-A, Deutsch DT04-4P

- One Switching Output
- Stainless Steel & Titanium Wetted Parts
- Silicon-On-Sapphire Technology
- Factory Set



### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

|                       |                        |
|-----------------------|------------------------|
| Adjustment range max  | 100 bar                |
| Adjustment range min  | 0 bar                  |
| Electrical connection | Deutsch DT04-4P        |
| Process connection    | M10x1                  |
| Function              | Normally Closed (SPST) |
| Output                | NPN                    |
| Burst pressure        | 800 bar                |
| Pressure max          | 400 bar                |

#### TEMPERATURE & MATERIALS DATA



|                           |                                  |
|---------------------------|----------------------------------|
| Temperature of media from | -40 °C                           |
| Temperature of media to   | 125 °C                           |
| Temperature ambient from  | -40 °C                           |
| Temperature ambient to    | 100 °C                           |
| Material of body          | Stainless steel 1.4305           |
| Material of wetted parts  | Stainless steel 1.4305, Titanium |

ADDITIONAL DATA

|                                  |                                                                                    |
|----------------------------------|------------------------------------------------------------------------------------|
| Supply voltage dc max            | 32 V DC                                                                            |
| Supply voltage dc min            | 9.6 V DC                                                                           |
| Pressure rise                    | ≤ 5,000 bar/s                                                                      |
| Switching time                   | < 2 ms                                                                             |
| Switching point adjustment range | 2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory |
| Weight                           | 80 g                                                                               |

SAFETY & APPROVALS

|                            |                                                                           |
|----------------------------|---------------------------------------------------------------------------|
| IP class                   | IP67, IP6K9K                                                              |
| Hysteresis                 | 2..99.8% of nominal pressure range (full scale), programmable at factory  |
| Shock resistance           | 500m / s²; 11 ms half sine wave; DIN EN 60068-2-27                        |
| Vibration resistance       | 20g: 4..2000 Hz sine wave, DIN EN 60068-2-6                               |
| EMC                        | EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007                      |
| Accuracy                   | ±0.5 % of adjustment range (Full scale) at room temperature               |
| Long term stability        | ±0.1 % of adjustment range (full scale) per year                          |
| Mechanical life expectancy | 10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure |
| Repeatability              | ±0.1 % full scale                                                         |

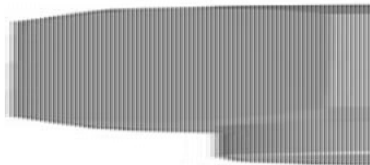

| Pin | Assignment |
|-----|------------|
| 1   | Line       |
| 2   | Out        |
| 3   | Out        |
| 4   | Out        |
| 5   | Out        |

IP67  
 L = 60/75 mm  
 Ø = 30 mm  
 Order number: 001  
\* without cable (cable) = 60 mm, with cable (cable) = 75 mm

| Pin | Assignment |
|-----|------------|
| 1   | Line       |
| 2   | NC         |
| 3   | NC         |
| 4   | Out        |

IP67  
 L = 54 mm  
 Ø = 22 mm  
 Order number: 002

| Pin | Assignment |
|-----|------------|
| 1   | Line       |
| 2   | NC         |
| 3   | NC         |
| 4   | Out        |

IP67  
 L = 54 mm  
 Ø = 22 mm  
 Order number: 004

| Pin | Assignment |
|-----|------------|
| 1   | Out        |
| 2   | Out        |
| 3   | Out        |
| 4   | Out        |

IP67  
 L = 71 mm  
 Ø = 28 mm  
 Order number: 007

| Pin | Assignment |
|-----|------------|
| 1   | Line       |
| 2   | Line       |
| 3   | NC         |
| 4   | Out        |

IP67  
 L = 58 mm  
 Ø = 22 mm  
 Order number: 008

| Pin | Assignment |
|-----|------------|
| 1   | Line       |
| 2   | Line       |
| 3   | Out        |

IP67  
 L = 58 mm  
 Ø = 22 mm  
 Order number: 010

Cable connection

| Cable | Assignment |
|-------|------------|
| red   | Line       |
| white | Out        |
| black | Out        |

IP67  
 L = 68 mm  
 (a 20 mm band adjust)  
 cable length = 2 m  
 Ø = 22 mm  
 Order number: 011

Thread code: 41

Thread code: 03

Thread code: 04

Thread code: 09

Thread code: 05

Thread code: 06

Thread code: 21

Thread code: 42

hex 22  
 Connection diagrams  
 No. assigned depending on each connector  
 100% dry for 100%

No. assigned depending on each connector  
 100% dry for 100%

Technical modifications and errors excepted.

| Pin | Assignment |
|-----|------------|
| 1   | Line       |
| 2   | Out        |
| 3   | Out        |
| 4   | Out        |
| 5   | Out        |

IP67  
 L = 60/75 mm  
 Ø = 30 mm  
 Order number: 001  
\* without cable (cable) = 60 mm, with cable (cable) = 75 mm

| Pin | Assignment |
|-----|------------|
| 1   | Line       |
| 2   | NC         |
| 3   | NC         |
| 4   | Out        |

IP67  
 L = 54 mm  
 Ø = 22 mm  
 Order number: 002

| Pin | Assignment |
|-----|------------|
| 1   | Line       |
| 2   | NC         |
| 3   | NC         |
| 4   | Out        |

IP67  
 L = 54 mm  
 Ø = 22 mm  
 Order number: 004

| Pin | Assignment |
|-----|------------|
| 1   | Out        |
| 2   | Out        |
| 3   | Out        |
| 4   | Out        |

IP67  
 L = 71 mm  
 Ø = 28 mm  
 Order number: 007

| Pin | Assignment |
|-----|------------|
| 1   | Line       |
| 2   | Line       |
| 3   | NC         |
| 4   | Out        |

IP67  
 L = 58 mm  
 Ø = 22 mm  
 Order number: 008

| Pin | Assignment |
|-----|------------|
| 1   | Line       |
| 2   | Line       |
| 3   | Out        |

IP67  
 L = 58 mm  
 Ø = 22 mm  
 Order number: 010

Cable connection

| Cable | Assignment |
|-------|------------|
| red   | Line       |
| white | Out        |
| black | Out        |

IP67  
 L = 68 mm  
 (a 20 mm band adjust)  
 cable length = 2 m  
 Ø = 22 mm  
 Order number: 011

Thread code: 41

Thread code: 03

Thread code: 04

Thread code: 09

Thread code: 05

Thread code: 06

Thread code: 21

Thread code: 42