



SUCO 0533 ELECTRONIC PRESSURE SWITCH

053325204B011

NPN output (Low Side), NC, 0-250 Bar, NPT 1/8, Cable connection

- One Switching Output
- Stainless Steel & Titanium Wetted Parts
- Silicon-On-Sapphire Technology
- Factory Set



PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Adjustment range max	250 bar
Adjustment range min	0 bar
Electrical connection	Embedded 2m cable
Process connection	1/8 NPT
Function	Normally Closed (SPST)
Output	NPN
Burst pressure	2000 bar
Pressure max	1000 bar

TEMPERATURE & MATERIALS DATA


Temperature of media from	-40 °C
Temperature of media to	125 °C
Temperature ambient from	-40 °C
Temperature ambient to	100 °C
Material of body	Stainless steel 1.4305
Material of wetted parts	Stainless steel 1.4305, Titanium

ADDITIONAL DATA

Supply voltage dc max	32 V DC
Supply voltage dc min	9.6 V DC
Pressure rise	≤ 5,000 bar/s
Switching time	< 2 ms
Switching point adjustment range	2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory
Weight	135 g

SAFETY & APPROVALS

IP class	IP67
Hysteresis	2..99.8% of nominal pressure range (full scale), programmable at factory
Shock resistance	500m / s²; 11 ms half sine wave; DIN EN 60068-2-27
Vibration resistance	20g; 4..2000 Hz sine wave, DIN EN 60068-2-6
EMC	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Long term stability	±0.1 % of adjustment range (full scale) per year
Mechanical life expectancy	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
Repeatability	±0.1 % full scale

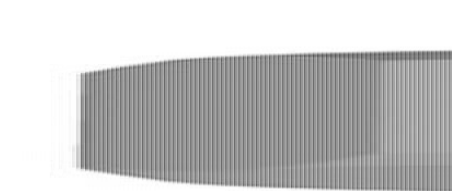

DIN EN 175305-803-A

M 12 - DIN EN 45756-2-101-A

ISO 15170-A1-A1

AMP Superseal

DEUTSCH DT04-4P

DEUTSCH DT04-3P

Cable connection

Thread code 01

Thread code 02

Thread code 04

Thread code 05

Thread code 06

Thread code 07

Thread code 08

Thread code 09

Thread code 10


Thread code 11

Thread code 12




haz 221

Connection diagrams



Do not connect directly to each connector
Vcc 2 only for 4-20 mA



Do not connect directly to each connector
Vcc 2 only for 0-5V

Technical modifications and errors excepted.

DN EN 175301-803-A <table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Vcc</td></tr><tr><td>2</td><td>Out</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Out</td></tr></table> IP67 • 60 / 70 mm² • Ø 10 mm Order number: 000	Pin	Assignment	1	Vcc	2	Out	3	Gnd	4	Out	M 12 - DN EN 61076-3-001 A <table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Vcc</td></tr><tr><td>2</td><td>In</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Out</td></tr></table> IP67 • 54 mm • Ø 11 mm Order number: 002	Pin	Assignment	1	Vcc	2	In	3	Gnd	4	Out	ISO 15175-A1-4.1 <table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Vcc</td></tr><tr><td>2</td><td>In</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Out</td></tr></table> IP67 • 65 mm pins • Ø 17 mm Order number: 004	Pin	Assignment	1	Vcc	2	In	3	Gnd	4	Out	AMP Superseal <table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Out</td></tr><tr><td>2</td><td>Gnd</td></tr><tr><td>3</td><td>Vcc</td></tr><tr><td>4</td><td>Out</td></tr></table> IP67 • 73 mm • Ø 26 mm Order number: 007	Pin	Assignment	1	Out	2	Gnd	3	Vcc	4	Out
Pin	Assignment																																										
1	Vcc																																										
2	Out																																										
3	Gnd																																										
4	Out																																										
Pin	Assignment																																										
1	Vcc																																										
2	In																																										
3	Gnd																																										
4	Out																																										
Pin	Assignment																																										
1	Vcc																																										
2	In																																										
3	Gnd																																										
4	Out																																										
Pin	Assignment																																										
1	Out																																										
2	Gnd																																										
3	Vcc																																										
4	Out																																										
Cable connection																																											
DEUTSCH DT04-4P <table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Gnd</td></tr><tr><td>2</td><td>Vcc</td></tr><tr><td>3</td><td>V+</td></tr><tr><td>4</td><td>Out</td></tr></table> IP67 • 38 mm • Ø 21 mm Order number: 008	Pin	Assignment	1	Gnd	2	Vcc	3	V+	4	Out	DEUTSCH DT04-3P <table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>A</td><td>Vcc</td></tr><tr><td>B</td><td>Gnd</td></tr><tr><td>C</td><td>Out</td></tr></table> IP67 • 38 mm • Ø 21 mm Order number: 009	Pin	Assignment	A	Vcc	B	Gnd	C	Out	<table><tr><th>Cable</th><th>Assignment</th></tr><tr><td>red</td><td>Vcc</td></tr><tr><td>white</td><td>Out</td></tr><tr><td>black</td><td>Gnd</td></tr></table> IP67 • 64 mm 16-20 mm band width Cable length = 2 m • Ø 22 mm Order number: 011	Cable	Assignment	red	Vcc	white	Out	black	Gnd															
Pin	Assignment																																										
1	Gnd																																										
2	Vcc																																										
3	V+																																										
4	Out																																										
Pin	Assignment																																										
A	Vcc																																										
B	Gnd																																										
C	Out																																										
Cable	Assignment																																										
red	Vcc																																										
white	Out																																										
black	Gnd																																										
Thread code: 01	Thread code: 02	Thread code: 03	Thread code: 04																																								
Thread code: 05	Thread code: 06	Thread code: 07	Thread code: 08																																								