



SUCO 0533 ELECTRONIC PRESSURE SWITCH

053360221B008
NPN output (Low Side), NC, 0-600 Bar, 9/16 – 18 UNF,
Deutsch DT04-4P

- One Switching Output
- Stainless Steel & Titanium Wetted Parts
- Silicon-On-Sapphire Technology
- Factory Set



PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Adjustment range max	600 bar
Adjustment range min	0 bar
Electrical connection	Deutsch DT04-4P
Process connection	9/16-18UNF
Function	Normally Closed (SPST)
Output	NPN
Burst pressure	2000 bar
Pressure max	1650 bar

TEMPERATURE & MATERIALS DATA


Temperature of media from	-40 °C
Temperature of media to	125 °C
Temperature ambient from	-40 °C
Temperature ambient to	100 °C
Material of body	Stainless steel 1.4305
Material of wetted parts	Stainless steel 1.4305, Titanium

ADDITIONAL DATA

Supply voltage dc max	32 V DC
Supply voltage dc min	9.6 V DC
Pressure rise	≤ 5,000 bar/s
Switching time	< 2 ms
Switching point adjustment range	2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory
Weight	80 g

SAFETY & APPROVALS

IP class	IP67, IP6K9K
Hysteresis	2..99.8% of nominal pressure range (full scale), programmable at factory
Shock resistance	500m / s ² ; 11 ms half sine wave; DIN EN 60068-2-27
Vibration resistance	20g; 4..2000 Hz sine wave, DIN EN 60068-2-6
EMC	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Long term stability	±0.1 % of adjustment range (full scale) per year
Mechanical life expectancy	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
Repeatability	±0.1 % full scale

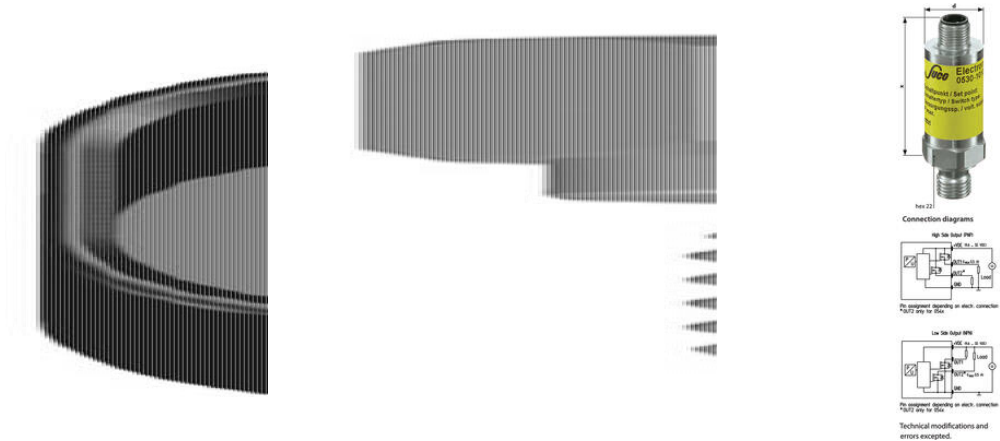

Pin	Assignment
1	Line
2	Out
3	Out
4	Out
5	Out

IP67
 $\times = 60/75 \text{ mm}^3$
 $\phi = 10 \text{ mm}$
Order number: 001
*without cable (cable) = 000, with cable (cable) = 000

Pin	Assignment
1	Line
2	NC
3	NC
4	Out

IP67
 $\times = 54 \text{ mm}$
 $\phi = 12/17 \text{ mm}$
Order number: 002
*without cable (cable) = 000, with cable (cable) = 000

Pin	Assignment
1	Line
2	NC
3	NC
4	Out

IP67
 $\times = 65 \text{ mm}$
 $\phi = 12/17 \text{ mm}$
Order number: 004
*without cable (cable) = 000, with cable (cable) = 000

Pin	Assignment
1	Out
2	Out
3	Out
4	Out

IP67
 $\times = 71 \text{ mm}$
 $\phi = 12/17 \text{ mm}$
Order number: 007
*without cable (cable) = 000, with cable (cable) = 000

Pin	Assignment
1	Line
2	Line
3	NC
4	Out

IP67
 $\times = 58 \text{ mm}$
 $\phi = 12/17 \text{ mm}$
Order number: 008
*without cable (cable) = 000, with cable (cable) = 000

Pin	Assignment
1	Line
2	Line
3	Out

IP67
 $\times = 58 \text{ mm}$
 $\phi = 12/17 \text{ mm}$
Order number: 010
*without cable (cable) = 000, with cable (cable) = 000

Cable connection

Cable	Assignment
red	Line
white	Out
black	Out

IP67
 $\times = 68 \text{ mm}$
 $\phi = 12/17 \text{ mm}$
Order number: 011
*without cable (cable) = 000, with cable (cable) = 000

Thread code: 41

Thread code: 03

Thread code: 04

Thread code: 09

Thread code: 05

Thread code: 10

Thread code: 21

Thread code: 42

Electron 0530-10

hex 23

Connection diagrams

High load: 100 A, 250 V, 10 mm²

Low load: 10 A, 250 V, 10 mm²

Technical modifications and errors excepted.

Pin	Assignment
1	Line
2	Out
3	Out
4	Out
5	Out

IP67
 $\times = 60/75 \text{ mm}^3$
 $\phi = 10 \text{ mm}$
Order number: 001
*without cable (cable) = 000, with cable (cable) = 000

Pin	Assignment
1	Line
2	NC
3	NC
4	Out

IP67
 $\times = 54 \text{ mm}$
 $\phi = 12/17 \text{ mm}$
Order number: 002
*without cable (cable) = 000, with cable (cable) = 000

Pin	Assignment
1	Line
2	NC
3	NC
4	Out

IP67
 $\times = 65 \text{ mm}$
 $\phi = 12/17 \text{ mm}$
Order number: 004
*without cable (cable) = 000, with cable (cable) = 000

Pin	Assignment
1	Out
2	Out
3	Out
4	Out

IP67
 $\times = 71 \text{ mm}$
 $\phi = 12/17 \text{ mm}$
Order number: 007
*without cable (cable) = 000, with cable (cable) = 000

Pin	Assignment
1	Line
2	Line
3	NC
4	Out

IP67
 $\times = 58 \text{ mm}$
 $\phi = 12/17 \text{ mm}$
Order number: 008
*without cable (cable) = 000, with cable (cable) = 000

Pin	Assignment
1	Line
2	Line
3	Out

IP67
 $\times = 58 \text{ mm}$
 $\phi = 12/17 \text{ mm}$
Order number: 010
*without cable (cable) = 000, with cable (cable) = 000

Cable connection

Cable	Assignment
red	Line
white	Out
black	Out

IP67
 $\times = 68 \text{ mm}$
 $\phi = 12/17 \text{ mm}$
Order number: 011
*without cable (cable) = 000, with cable (cable) = 000

Thread code: 41

Thread code: 03

Thread code: 04

Thread code: 09

Thread code: 05

Thread code: 10

Thread code: 21

Thread code: 42