OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

SUPER FLUSH ILLUMINATED PUSHBUTTON

Super Flush Head

L23AH40
Pushbutton Illuminated Super Flush Spring Return
Yellow



- IP66 / IP69K
- Spring return
- Low profile flush mount
- Illuminate with LED blocks

PRODUCT DESCRIPTION


Illuminated super flush pushbutton heads that mount in a 30.5mm hole with protection rating IP66 / IP69K
Ideal for applications where a tamper proof, low profile button is required as only protrudes from front of panel by 2.8mm.
Combine with clip, contact blocks and LED module (must be in centre position) to make complete illuminated pushbutton assembly.
Available in multiple colours in spring return with a metallic chrome bezel.
Optional text or symbol can be added please enquire for more details.


TECHNICAL DATA

Type	Super flush pushbutton
Function	Spring return
Colour	Yellow
Illuminated	Yes

IP class	IP66
Impact resistance	IK05
Temperature operational min	-25 °C
Temperature operational max	70 °C
Storage temperature min	-40 °C
Storage temperature max	70 °C
Mechanical life expectancy	5 000 000 cycles
Approvals	UL 508, CSA 22.2, BV, CB, CE
Recommended tightening torque	3


Climatic resistance - cyclic damp heat	IEC 60068-2-30
Climatic resistance - sea air	IEC 60068-2-52
Climatic resistance - constant humid heat	IEC 60068-2-3

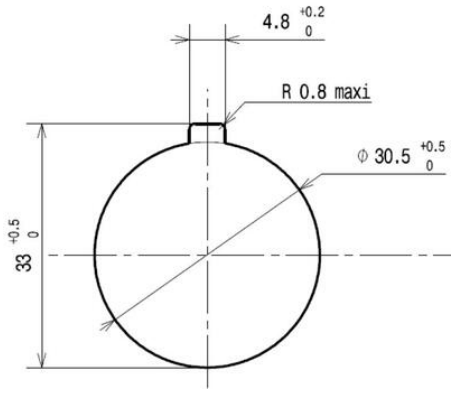


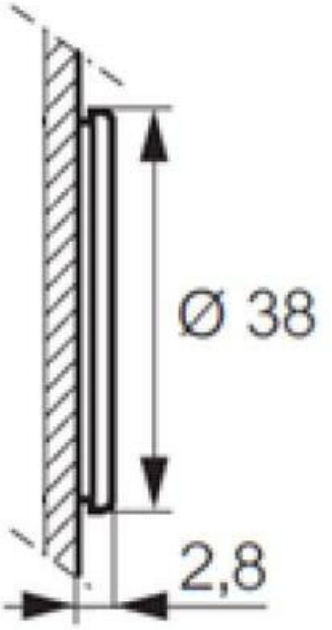






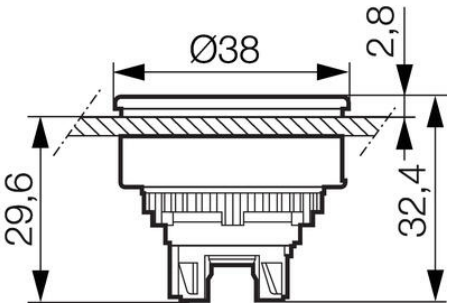

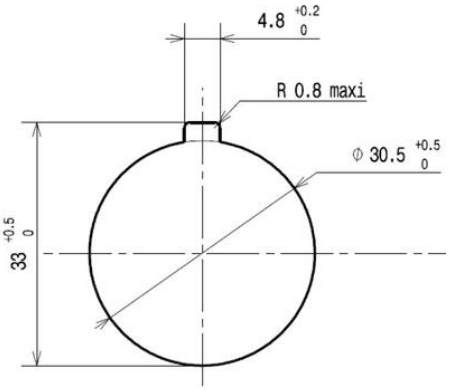

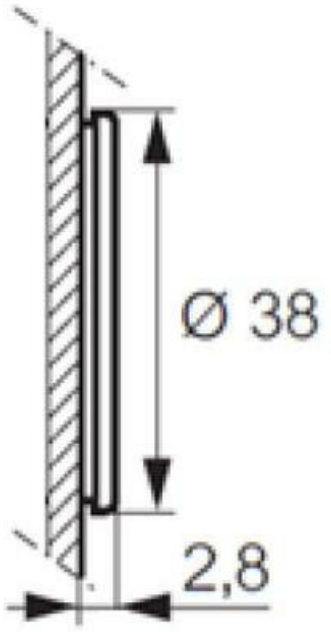
Ø 38
2,8



