OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

NON-ILLUMINATED MUSHROOM HEADS

Non Illuminated

L22DD03
Mushroom Head Dia. 40mm Pull Reset Black



- IP66 / IP69K
- Head size Ø32mm or Ø40mm
- Pull, turn or key reset
- Various colour & text options

PRODUCT DESCRIPTION

Non illuminated, latching mushroom heads that mount in a 22.5mm hole with protection rating IP66 / IP69K

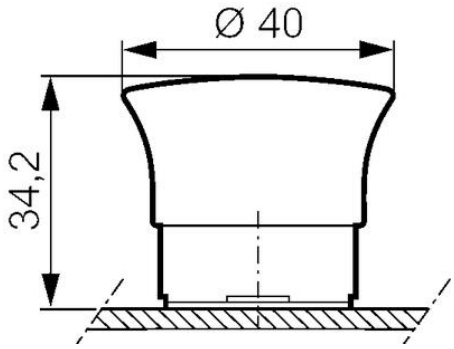
Available in head sizes Ø32mm & Ø40mm with reset options of pull, turn & key release.

Combine with separate clip and contact blocks to make a complete mushroom head assembly.

TECHNICAL DATA

Type	Mushroom ø40mm
Function	Pull to reset
Colour	Black
Illuminated	No

IP class	IP66, IP69, IP69K
Impact resistance	IK05
Temperature operational min	-25 °C
Temperature operational max	70 °C
Storage temperature min	-40 °C
Storage temperature max	70 °C
Mechanical life expectancy	150 000 cycles
Approvals	UL 508, CSA 22.2, BV, CB, CE
Recommended tightening torque	3
Climatic resistance - cyclic damp heat	IEC 60068-2-30
Climatic resistance - sea air	IEC 60068-2-52
Climatic resistance - constant humid heat	IEC 60068-2-3


Ø 40
34,2