

SHORT HANDLE NON-ILLUMINATED SELECTOR SWITCH

Short Lever Handle

L21MD03

Selector Handle 3 Position Spring Return 45° Black

- IP66 / IP69K
- 2 or 3 position
- Latching or spring return
- Optional lever colours



PRODUCT DESCRIPTION

Non illuminated selector switch head with a short lever handle that mount in a 22.5mm hole with protection rating IP66 / IP69K. Combine with separate clip and contact blocks to make complete switch assembly.

Standard body colour is grey with a black lever but also available with red, green & grey lever please enquire for more details.

Available in 2 or 3 position, latching or spring return in various switching angles.



Supplied with a matt chrome bezel as standard.

For black plastic bezel change the part number from L21xxxx to L22xxxx.

TECHNICAL DATA


| | |
|---|------------------------------|
| Angle | 45° |
| Approvals | UL 508, CSA 22.2, BV, CB, CE |
| Climatic resistance - constant humid heat | IEC 60068-2-3 |
| Climatic resistance - cyclic damp heat | IEC 60068-2-30 |
| Climatic resistance - sea air | IEC 60068-2-52 |
| Colour | Black |
| Function | Spring return |
| Illuminated | No |
| Impact resistance | IK05 |
| IP class | IP66, IP69, IP69K |
| Mechanical life expectancy | 300 000 cycles |
| Positions | 3 |

| | |
|-------------------------------|-----------------------|
| Protection class | II (double insulated) |
| Recommended tightening torque | 3 |
| Storage temperature max | 70 °C |
| Storage temperature min | -40 °C |
| Temperature operational max | 70 °C |
| Temperature operational min | -25 °C |
| Type | Short lever |
| Weight | 17.8 g |

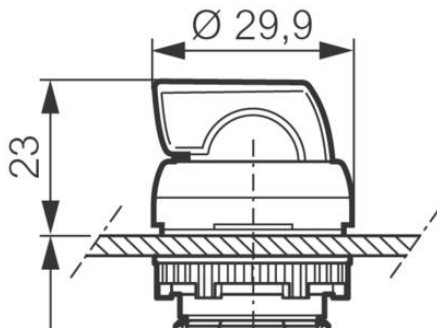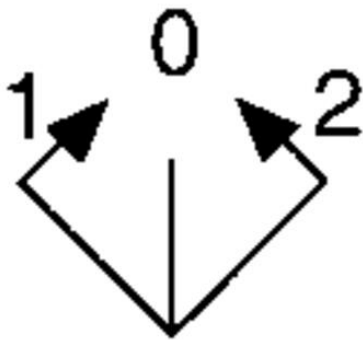

Kontakternas funktion till obelyst vred med 3 positioner

Vredets position sett framifrån panelen.
Kontaktblockens aktivitet sett framifrån panelen.

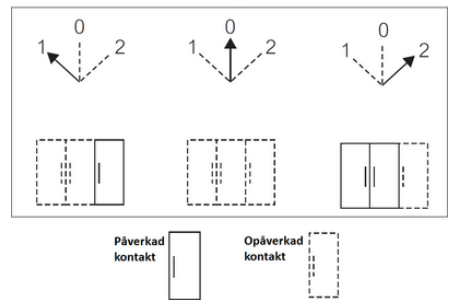

Kontaktien toiminta 3-asentoisille valintakytkimille (ei valoa)

Valintakytkimen asento paneelin edestä katsottuna
Kosketinkytköiden toiminta paneelin edestä katsottuna

