

## LONG HANDLE NON-ILLUMINATED SELECTOR SWITCH

Long Lever Handle

L21MU03  
Selector Long Handle 3 Position Spring Return 45°  
Black



- IP66 / IP69K
- 2 or 3 position
- Latching or spring return
- Optional lever colours

### PRODUCT DESCRIPTION

Non illuminated selector switch head with a long lever handle that mount in a 22.5mm hole with protection rating IP66 / IP69K  
Combine with separate clip and contact blocks to make complete switch assembly.

Standard body colour is grey with a black lever but also available with red, green & grey lever please enquire for more details.

Available in 2 or 3 position, latching or spring return in various switching angles.


Supplied with a matt chrome bezel as standard.

For black plastic bezel change the part number from L21xxxx to L22xxxx.

## TECHNICAL DATA

|                                           |                              |
|-------------------------------------------|------------------------------|
| Angle                                     | 45°                          |
| Approvals                                 | UL 508, CSA 22.2, BV, CB, CE |
| Climatic resistance - constant humid heat | IEC 60068-2-3                |
| Climatic resistance - cyclic damp heat    | IEC 60068-2-30               |
| Climatic resistance - sea air             | IEC 60068-2-52               |
| Colour                                    | Black                        |
| Function                                  | Spring return                |
| Illuminated                               | No                           |
| Impact resistance                         | IK05                         |
| IP class                                  | IP66, IP69, IP69K            |
| Mechanical life expectancy                | 300 000 cycles               |
| Positions                                 | 3                            |
| Protection class                          | II (double insulated)        |

|                               |            |
|-------------------------------|------------|
| Recommended tightening torque | 3          |
| Storage temperature max       | 70 °C      |
| Storage temperature min       | -40 °C     |
| Temperature operational max   | 70 °C      |
| Temperature operational min   | -25 °C     |
| Type                          | Long lever |
| Weight                        | 17.8 g     |

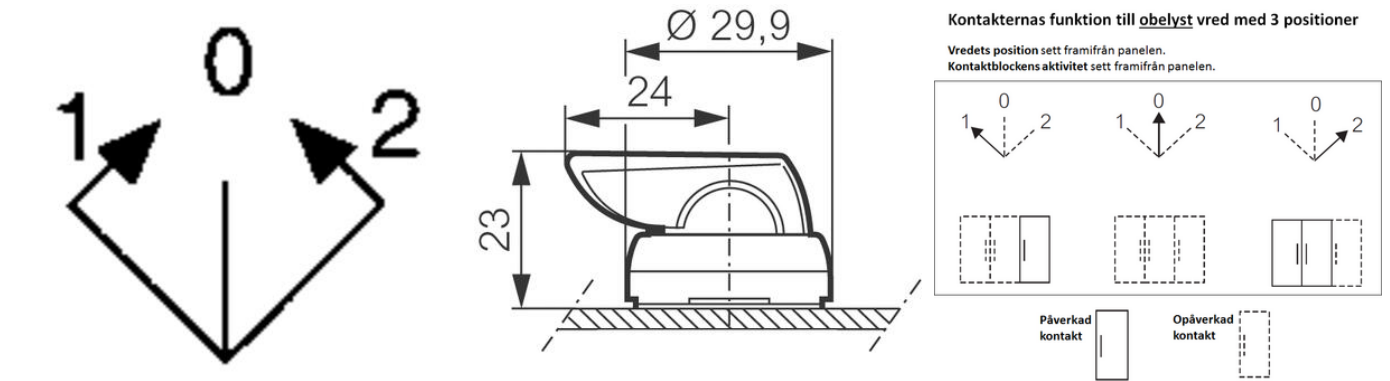

Kontaktien toiminta 3-asentoisille valintakytkimille (ei valoa)

Valintakytkimen asento paneelin edestä katsottuna  
Kosketinyksiköiden toiminta paneelin edestä katsottuna

