

KNOB HANDLE NON-ILLUMINATED SELECTOR SWITCH

Knob Handle

L21UB03
Selector Knob 3 Position Spring Return 45° Black

- IP66
- 2 or 3 position
- Latching or spring return



PRODUCT DESCRIPTION

Non illuminated selector switch head with a knob handle that mount in a 22.5mm hole with protection rating IP66
Combine with separate clip and contact blocks to make complete switch assembly.

Standard body colour is black.

Available in 2 or 3 position, latching or spring return in various switching angles.



Supplied with a matt chrome bezel as standard.

For black plastic bezel change the part number from L21xxxx to L22xxxx.

TECHNICAL DATA

Angle	45°
Approvals	UL 508, CSA 22.2, BV, CB, CE
Climatic resistance - constant humid heat	IEC 60068-2-3
Climatic resistance - cyclic damp heat	IEC 60068-2-30
Climatic resistance - sea air	IEC 60068-2-52
Colour	Black
Function	Spring return
Illuminated	No
Impact resistance	IK05
IP class	IP66, IP69, IP69K
Mechanical life expectancy	300 000 cycles
Positions	3
Protection class	II (double insulated)
Recommended tightening torque	3

Storage temperature max	70 °C
Storage temperature min	-40 °C
Temperature operational max	70 °C
Temperature operational min	-25 °C
Type	Knob
Weight	17.8 g

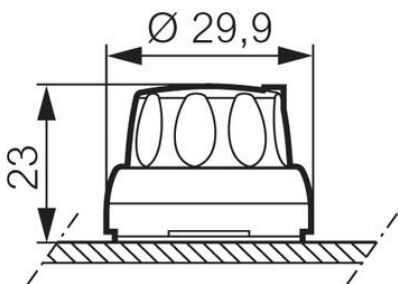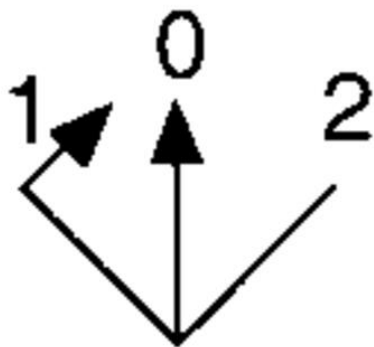

Kontaktien toiminta 3-asentoisille valintakytkimille (ei valoa)

Valintakytkimen asento paneelin edestä katsottuna
Kosketinyksiköiden toiminta paneelin edestä katsottuna

